

LED Spot / Track Light



TIS TRL100K

Specification

Housing	Die-cast and extruded aluminium
Finishing	Powder coated in white or black
Mounting	1 circuit lighting track (LTS01/LTR01)
Power	18/23/27/30W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
LED Output	18W : 2062/2226/2418 lm 23W : 2635/2845/3090 lm 27W : 3065/3300/3515 lm 30W : 3500/3770/4015 lm

Luminaire Output

18W : 1597/1725/1869 lm *
23W : 2491/2690/2915 lm **
27W : 2847/3046/3275 lm **
30W : 3096/3343/3560 lm **

Beam Angle

20/30/50/60 Degree

Control Gear

Built-in driver

Power Supply

220-240VAC, 50Hz

Power Factor

>0.9

Insulation Class

II

IP Rating

20

Lamp Lifetime

40,000 hrs.

Equivalent

18W : MH 20W

23W : MH 35W

27/30W : MH 70W






Remarks

* Value at 15 Degree

** Value at 30 Degree

Ordering Data


Model	Watt
TRL100K/WH-18LED	18W
TRL100K/WH-23LED	23W
TRL100K/WH-27LED	27W
TRL100K/WH-30LED	30W

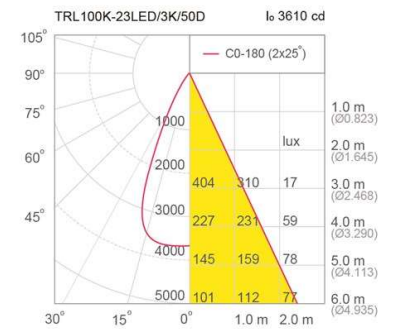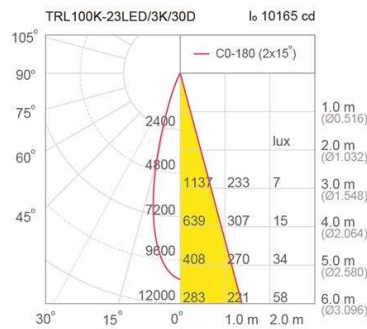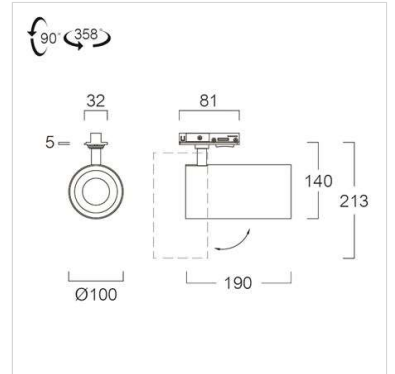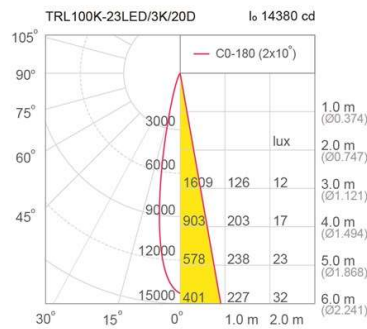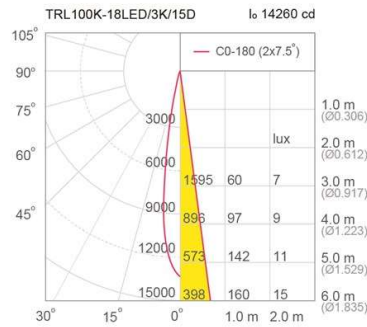

Related Products





TRL100K/BK

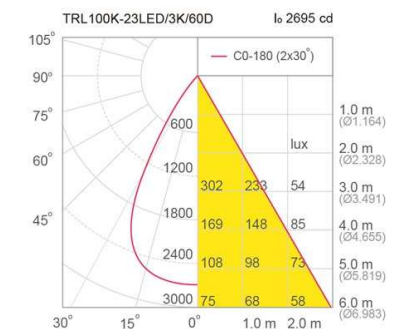



27W

30W



20D



30D



50D



60D

