

LED Recessed Downlight



TIS RAQ160D

Application


Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification

Housing	Painted steel frame and Die-cast aluminium lamp head
Finishing	Powder coated in black / white
Mounting	Recessed
Power	15-20W
Light Source	LED-QR111
Lamp Holder	G53
Colour Temperature	15W : 2700/3000K 20W : 3000/4000K
CRI	80
Lamp Output	15W : 830/840 lm 20W : 1350/1400 lm
Beam Angle	15W : 24/40 degree 20W : 12/24/40 degree
Control Gear	Separate magnetic or electronic transformer
Power Supply	220VAC, 50Hz (Magnetic transformer) 220-240VAC, 50Hz (Electronic transformer is available as option)
Power Factor	>0.9
Insulation Class	II
IP Rating	20
Luminaire Lifetime	15W : 40,000 hrs. 20W : 25,000 hrs.
Equivalent	15W : AR111 75W 20W : AR111 100W

Ordering Data

Model	Watt
RAQ160D/BK-XXLED	15-20W
RAQ160D/WH-XXLED	15-20W

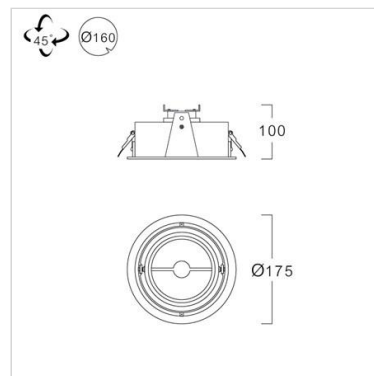

Related Products



Hood




Hood




RAQ160-LED QR111



RSAQ150-1xLED QR111



RSAQ150-2xLED QR111



RSAQ150D-1xLED QR111



RSAQ150D-2xLED QR111