

LED Surface Downlight




TIS **SDL193**

Application

Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification

Housing	Die-formed aluminium
Finishing	Powder coated in white or black
Mounting	Surface
Power	44/49W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	44W : 5110/5470/5830 lm 49W : 5555/5945/6335 lm
Luminaire Output	44W : 3769/4071/4410 lm 49W : 3977/4295/4653 lm
Beam Angle	75 degree
Control Gear	Built-in driver
Power Supply	220-240VAC,50Hz
Power Factor	>0,9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	40,000 hrs.
Equivalent	44W : MH 150W 49W : MH 150W

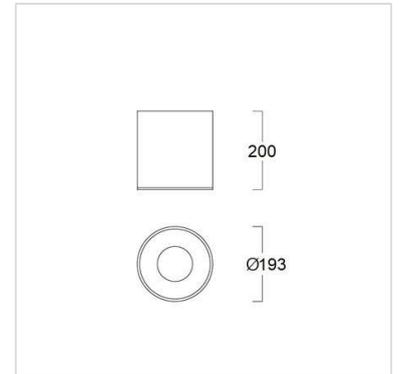

Ordering Data

Model	Watt
SDL193/WH-44LED	44W
SDL193/WH-49LED	49W

Related Products

