

LED Multi-Recessed Downlight



TIS RSAL83

Application





Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification


Housing	Die-cast aluminium
Finishing	Powder coated in white / black
Mounting	Recessed
Power	1 lamp : 14/20W 2 lamps : 28/40W 3 lamps : 42/60W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	14W : 1333/1397/1530 lm 20W : 2232/2430/2538 lm
Luminaire Output	14W : 1046/1096/1200 lm* 20W : 1790/1935/2005 lm*
Beam Angle	14W : 15/24/36/60 Degree 20W : 18/24/36/60 Degree
Control Gear	Separate driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	II
IP Rating	20
Luminaire Lifetime	25,000 hrs
Equivalent	MR16 50W
Remarks	*Value at 24 Degree

Ordering Data

Model	Watt
RSAL83/WH-1x14LED	14W
RSAL83/WH-1x20LED	20W
RSAL83/WH-2x14LED	28W
RSAL83/WH-2x20LED	40W
RSAL83/WH-3x14LED	42W
RSAL83/WH-3x20LED	60W

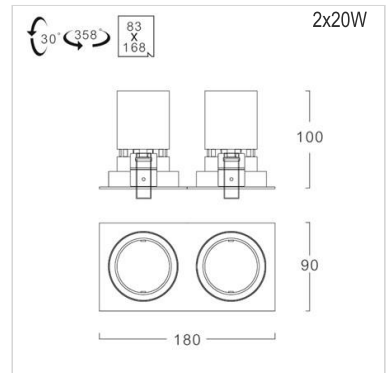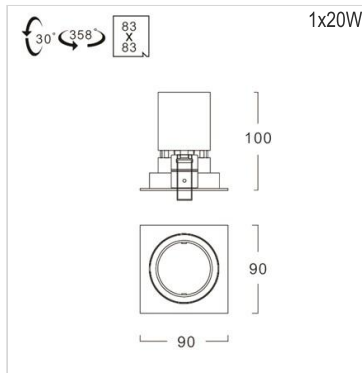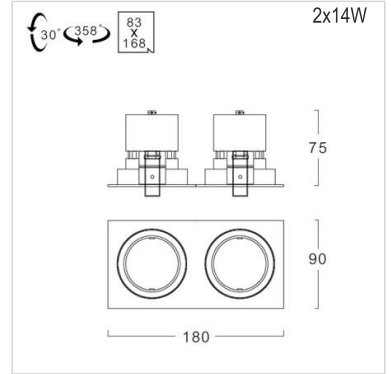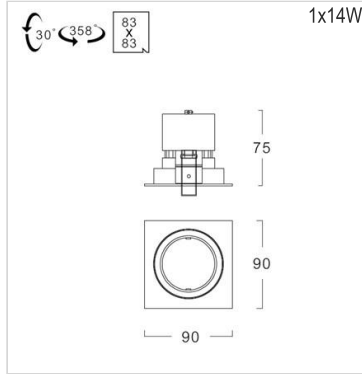

Related Products



Honey comb



Filter



Anti glare



Hood



RAL83-14W





RFL83-14W



RFL76J-14W





RSAL76J-14W

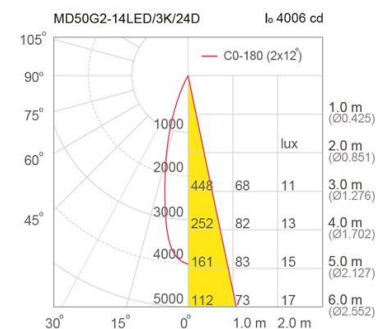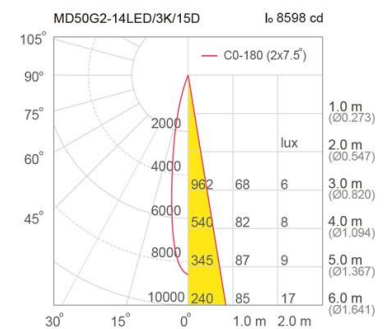



MD50-14W

MD50H-20W



15D / 18D

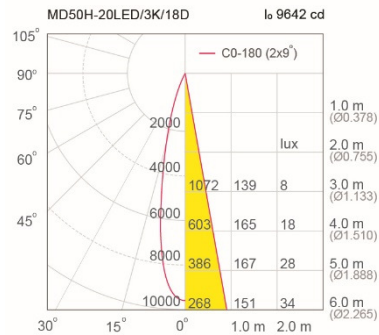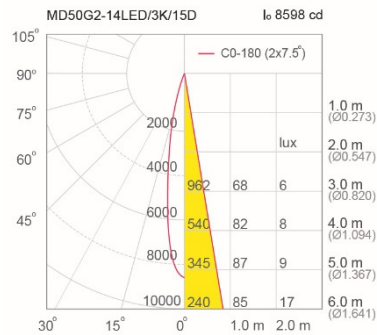

24D

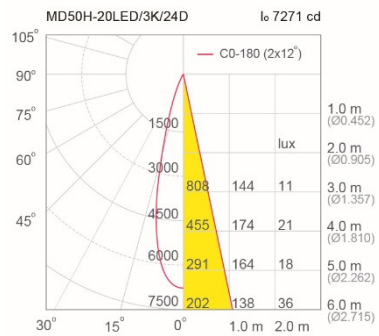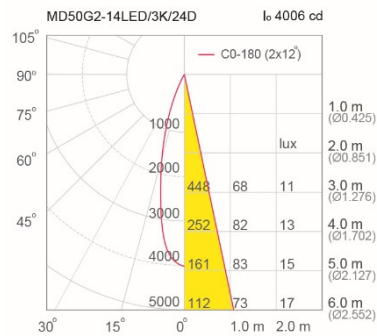

36D

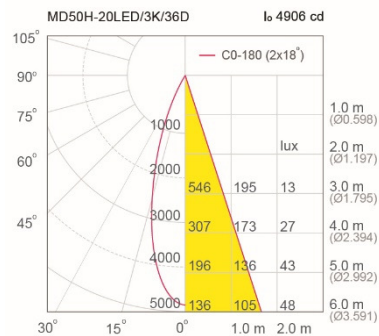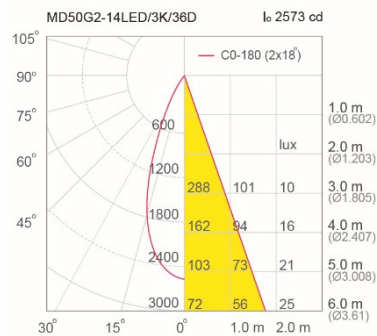

60D

