



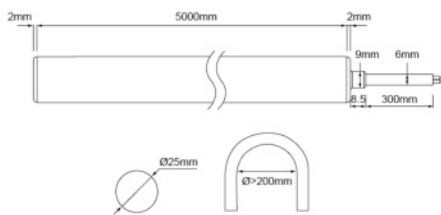


Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 50°C
IP Rating	65
CRI	≥ 80
Min.Cutting Unit	50mm
Max. Continuous Length	5m
Control Options	DMX (Via Remote Driver)
Weight (kg)	0.5 kg/m

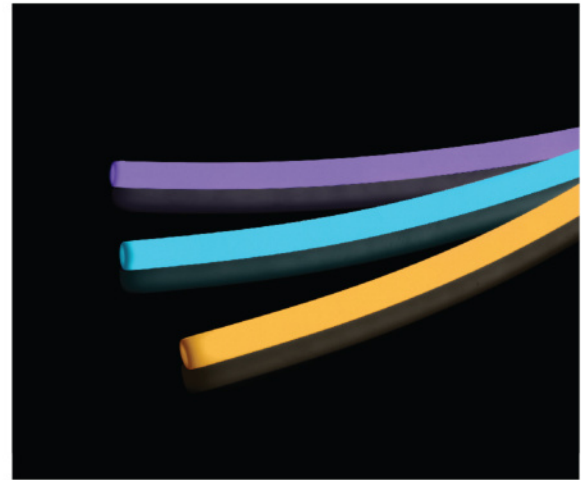


SLN360 (RGB / RGBW)

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
10W/m	RGB (248lm/m)	360°	24Vdc
16W/m	RGBW (510lm/m)		




Accessories


Injection-Moulded connector (E/S/B) + End cap



E = END



S = Side



End Cap

PC Profile
W = 30mm L = 1000mm H = 27.4mmPC Mounting Clips
W = 30mm L = 20mm H = 27.4mm

Horizontal Lifting Clip



Concealed PC Mounting Clips



Connector for Side outlet



Connector