

# LED Surface Square/Multi Downlight




## TIS SSAL150E

### Application

Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

### Specification

<b>Housing</b>	Printed steel frame and Die-cast aluminium lamp cover
<b>Finishing</b>	Powder coated in white / black
<b>Reflector</b>	Anodized aluminium
<b>Mounting</b>	Surface
<b>Power</b>	1 lamp : 23W / 2 lamps : 46W 1 lamp : 30W / 2 lamps : 60W 1 lamp : 35W / 2 lamps : 70W 1 lamp : 40W / 2 lamps : 80W
<b>Light Source</b>	LED-COB
<b>Colour Temperature</b>	3000/4000/5000K
<b>CRI</b>	>90/ >90/ >80
<b>Lamp Output</b>	23W : 2635/2845/3090 lm 30W : 3500/3770/4015 lm 35W : 3940/4245/4520 lm 40W : 4665/4995/5270 lm
<b>Luminaire Output</b>	23W : 2204/2380/2579 lm* 30W : 3110/3359/3577 lm* 35W : 3403/3675/3913 lm* 40W : 3919/4193/4428 lm*
<b>Beam Angle</b>	14/24/36/45/60 Degree
<b>UGR</b>	<19
<b>Control Gear</b>	Built-in driver
<b>Power Supply</b>	220-240VAC, 50Hz
<b>Power Factor</b>	>0.9
<b>Insulation Class</b>	I
<b>IP Rating</b>	20
<b>Luminaire Lifetime</b>	40,000 hrs
<b>Equivalent</b>	23W : MH 35W 30W : MH 70W 35W : MH 100W 40W : MH 100W
<b>Remarks</b>	*Value at 24 Degree

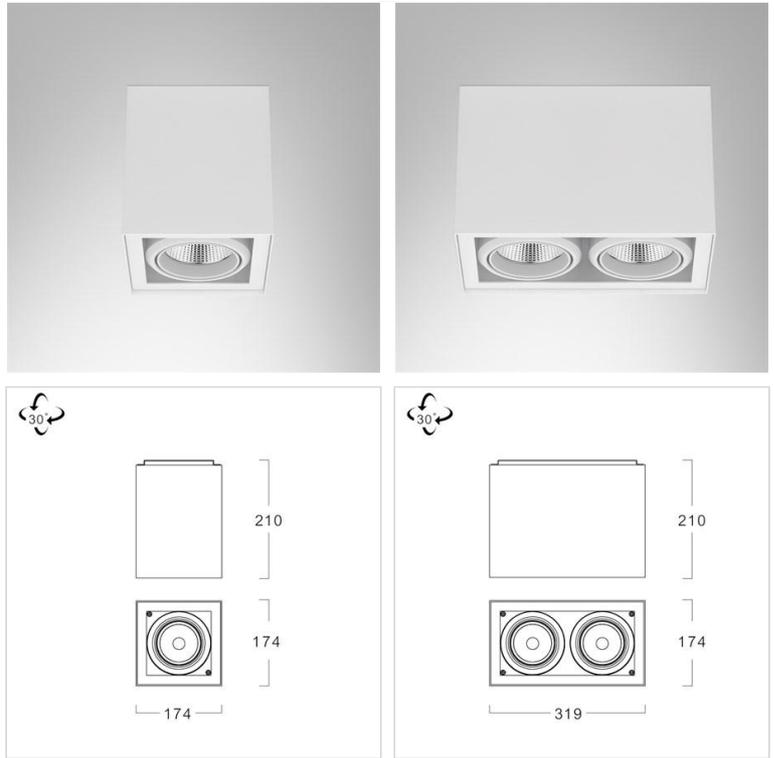

### Ordering Data

Model	Watt
SSAL150E/WH-1x23LED	23W
SSAL150E/WH-1x30LED	30W
SSAL150E/WH-1x35LED	35W
SSAL150E/WH-1x40LED	40W
SSAL150E/WH-2x23LED	46W
SSAL150E/WH-2x30LED	60W
SSAL150E/WH-2x35LED	70W
SSAL150E/WH-2x40LED	80W

### Related Products



Honey comb

Hood



SAL150E-23/30/35/40W

SAL115E-14/20/23/30W



23W

30W



14D





24D





36D



45D





60D





35W

40W



14D





24D



36D



45D



60D

