

LED Recessed Downlight



TIS RAL176J

Application


Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification


Housing	Die-cast Aluminum
Description	Primary reflector : Vacuum aluminum plating PC 4 different secondary reflectors are available for various applications WR (front reflector white) BR (front reflector black) MB (front reflector mirror black) MI (front reflector mirror chrome)
Finishing	Powder coated in white
Mounting	Recessed
Power	40/44/54/59W
Light Source	LED COB
Colour Temperature	3000K/4000K/5000K
CRI	>90/ >90/ >80
LED Output	40W : 4502/4581/5165 lm 44W : 4952/5039/5682 lm 54W : 6078/6184/6973 lm 59W : 6640/6756/7618 lm
Luminaire Output	40W : 3922/4196/4490 lm * 44W : 4257/4555/4874 lm ** 54W : 4784/5118/5477 lm ** 59W : 5094/5450/5832 lm **
Beam Angle	40W : 14 Degree 44/54/59W : 18/24/45/55 Degree
UGR	<19
Control Gear	Separate Driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
Luminaire Lifetime	40,000 hrs
Remarks	* Value at 14 Degree ** Value at 24 Degree

Ordering Data


Model	Watt
RAL176J/MI/WH-40LED	40W
RAL176J/MI/WH-44LED	44W
RAL176J/MI/WH-54LED	54W
RAL176J/MI/WH-59LED	59W

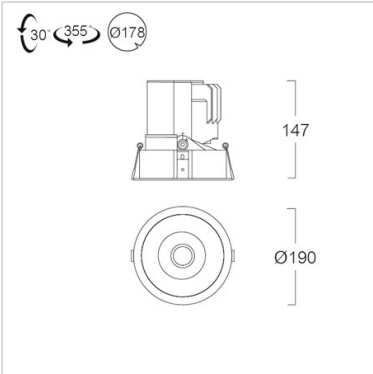

Related Products



Honey comb

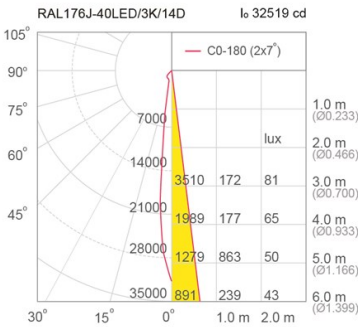




RAL176J

44W




54W

59W




18D



24D



45D



55D

