

LED Floodlight / Spotlight



TIS FLL231/S

Application





Floodlight is designed to illuminate building facade, building security, indoor and outdoor stadiums, monuments, statues, exhibition halls, shopping centers, showrooms, display areas, residences, etc.

Specification

Housing	Die-cast aluminium
Finishing	Powder coated in black
Lens	Clear toughened glass
Gasket	Silicone rubber
Dimension	190x285x240 mm.
Mounting	Surface
Power	70W
Light Source	LED-COB
Colour Temperature	3000/4000K
Luminaire Output	7350 lm
Beam Angle	18/28/56 degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	66
Luminaire Lifetime	50,000 hrs.
Equivalent	MH 150W

Ordering Data


Model	Watt
FLL231/S-70LED	70W

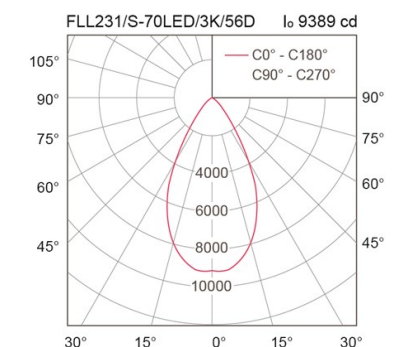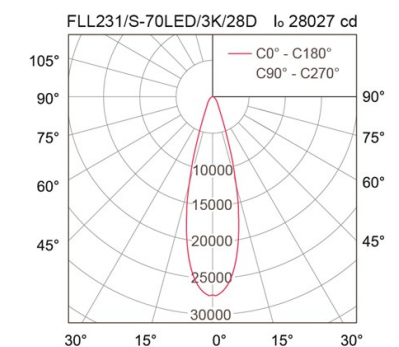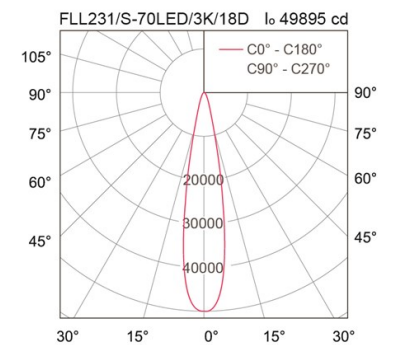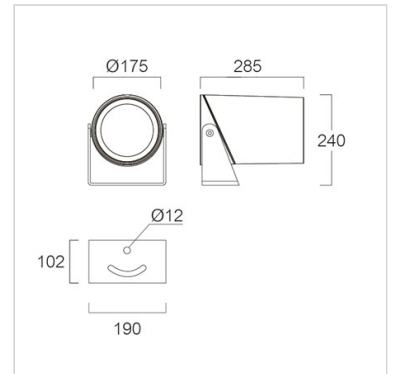

Related Products



Ground spike



Honey comb