

LED Recessed Linear

LUMAX

 TIS ERST300/2L/MT

Application


This luminaire is designed to use for office buildings,schools,storage areas,hospitals, and other working areas where is required highly uniformity illumination,etc.

Specification

Housing	Die-formed cold roll steel
Finishing	Powder coated in white
Reflector	Local mirror finish
Louver	Local mirror finish with Christmas tree profiled cross vanes
Mounting	Recessed
Power	2L: 28-32W (2 lamps)
Light Source	LED-T8
Lamp Holder	G13
Power Supply	220-240VAC, 50Hz
IP Rating	20
Remarks	Blade 8 pcs (9 cells per lamp)

Ordering Data

Model	Watt
ERST300/2L/OT-XXLED-T8	28-32W

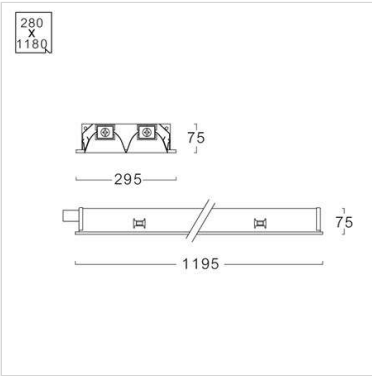

Related Products



LED-T8