

# LED Surface Downlight



TIS SFP80

## Application


Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

## Specification

<b>Housing</b>	Die-cast aluminium
<b>Description</b>	4 different lamp heads are available for various applications WR (front reflector white) BR (front reflector black) MI (front reflector chrome) MB (front reflector black chrome)
<b>Finishing</b>	Powder Coated in white/black
<b>Mounting</b>	Surface
<b>Power</b>	4-7W
<b>Light Source</b>	LED-PAR16
<b>Lamp Holder</b>	GU10
<b>Colour Temperature</b>	2700 - 4000K
<b>Lamp Output</b>	4.3W : 2700K : 380 lm 5.4W : 2700K : 402 lm 7W : 3000/4000K : 620 lm
<b>Power Supply</b>	220VAC, 50Hz (L&E lamps) 220-240VAC, 50Hz (other brand lamps are available as option)
<b>Insulation Class</b>	II
<b>IP Rating</b>	20
<b>Luminaire Lifetime Equivalent</b>	15,000-50,000 hrs. PAR16 35 - 50W

## Ordering Data

Model	Watt
SFP80/BR/WH-XXLED	4-7W
SFP80/MB/WH-XXLED	4-7W
SFP80/MI/WH-XXLED	4-7W
SFP80/WR/WH-XXLED	4-7W

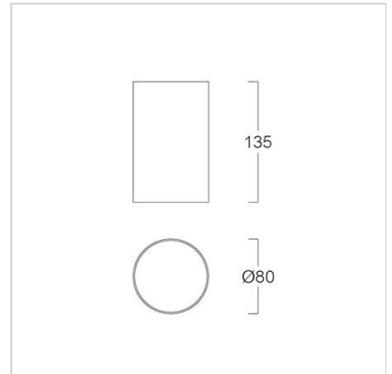

## Related Products

