

# SLN-ILB



## Free Bend In-ground Light Drive Over

combining a free bend stainless steel profile with a continuous silicone diffuser on the top, houses a waterproof flexible light. With a minimum bending diameter of 1200mm in both ways, **SLN-ILB** In-ground Light breaks free from concrete ground and gives wings to your imagination.

### Material :

Housing for In-ground Light, 3mm Thick Stainless Steel, 1004MM with 6 Expansion Screws

### Driver :

Remote 24 Vdc constant voltage driver or PWM driver

**life time** : 50,000 hours, (L70)

**Ambient Temperature** : -40°C ~ 55°C

**IP Rating** : 67

**Ra** : 80

**Min. Cutting Unit (The Internal light)** : 83.3 mm

**Max. Continuous Length (The Internal light)** : 10 m

**Standard Housing Length** : 500mm, 1000mm

**Factory Supplied Cable** :

2C x 0.75 mm<sup>2</sup>, L=3.00 m (Monochrome)

3C x 0.75 mm<sup>2</sup>, L=3.00 m (Dynamic white)



**Control** : On-off, 0-10V, DMX, DALI

**Weight** : 2.8 kg/m

**Drive over** : 3.5 Ton



3500kg @Φ50mm Stamp On Anti-slip Protection Protection Anti-UV

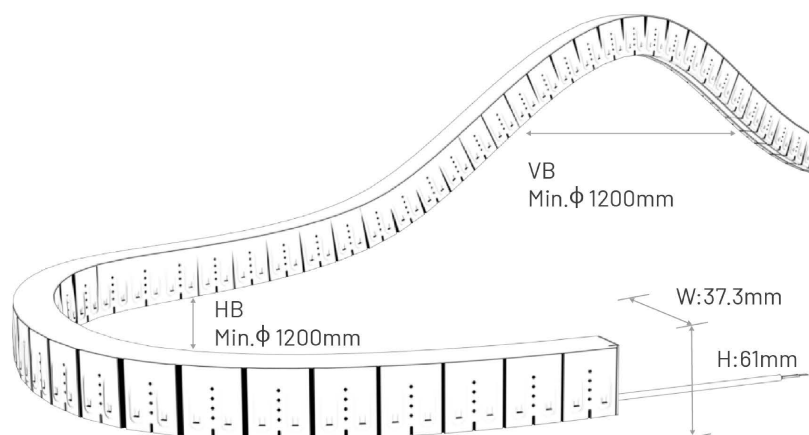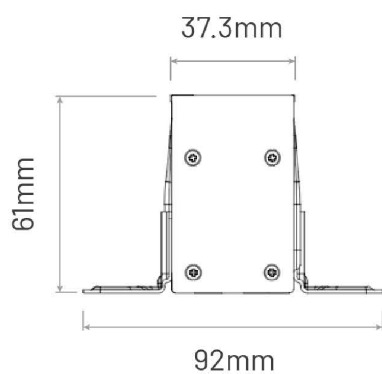

Model	Watt	CCT. (K)	Beam Angle	Color	Input (V)
SLN-ILB	12W/m	2100K (480lm/m) 3000K (500lm/m) 4000K (500lm/m) 5000K (500lm/m) DYNAMIC WHITE 2200K-6500K (405lm/m)	115°	-	24 Vdc



## Accessories



PVC Protection Cover  
(\*For protect the profile from debris)



Silicone Diffuser



Fixing Bracket



End Cover



Joining Bracket



IP67 Male+Female Connector

## Components

