

LED LINEAR DIFFUSER




LF011

Material	Extrusion aluminium body, die – casting aluminium end cap, toughened front glass
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 50°C
IP Rating	66
CRI	≥ 80
Control Options	Colorchange : DMX
Address per meter	8
Weight (kg)	0.8 kg/m




Black



LF011

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
3.6W (300mm)	2700 (540lm/m)	30°	24Vdc
6W (500mm)	3000 (540lm/m)	45°	
12W (1000mm)	4000 (575lm/m)	25°x 45°	
	6000 (610lm/m)		
	RGB (252lm/m)		
4.2W (300mm)	RGBW (384lm/m)		
7W (500mm)			
14W (1000mm)			

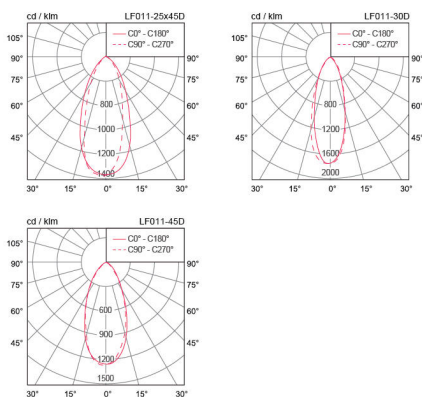

Accessories



Feeder Cable L = 350 mm