

LED Clean Room

RCRML300/FO

Application



Clean room is designed for unique application which is require limitation of dust such as food processing areas, control rooms, etc.

Specification

Housing	Die-formed cold roll steel Service method : Front opening Sealing : Triple gasketing system
Description	Can use for clean room class 10,000 or higher
Finishing	Powder coated in white
Diffuser	Prismatic (Opal, stipple, clear are available as option)
Mounting	Recessed
Power	16/32W
Light Source	LED Module
Colour Temperature	4000/6500K
Luminaire Output	2S : 16W : 1695 lm 2L : 32W : 3295 lm
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	50
Luminaire Lifetime	30,000 hrs.
Equivalent	16W : T5 2x14W/T8 2x18W 32W : T5 2x28W/T8 2x36W

Ordering Data

Model	Watt
RCRML300/FO/2S-16LED	16W
RCRML300/FO/2L-32LED	32W

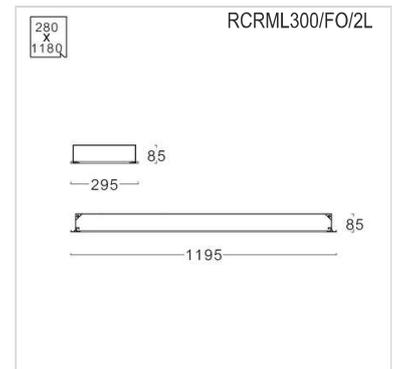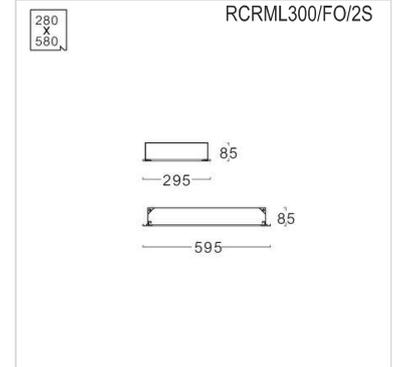

Related Products



LED Strip Module