



ZENSE Smart Driver(CV) 200W




Specification

- Wireless smart control by L&E Application "Zense+"
- Bluetooth mesh Protocol, Low power consumption
- Maximum 15m operating range between each nodes
- Compatible with Single color/ CCT Tunable/ RGB/ RGBW LED Strip light (Selectable by APP)

Model	ZDG2-4C-BT-SR-CV-200-RGBW-ID-EA
Connected Load	Constant Voltage Load
Input Power	110-277Vac, 50/60Hz
Output Voltage	12-24Vdc
Output Current	Max. 4.1A/CH Ch1+Ch2+Ch3+Ch4=8.4A (est.200W)
Output Channel	4Channels
Standby Power	1W
Dimmable Range	1-100%
IP Rating	IP20
Cover	Metal
Ambient Temperature	-20°C ~ 45°C
Max. Casing Temperature	85°C
Dimension	330x79x39mm


AC 100-277V
power input

Program Key: for pairing & delete pairing
with smart App and RF+Bluetooth remotes

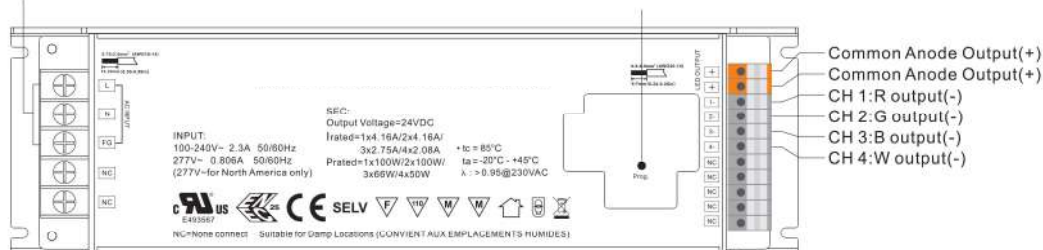

ZENSE Smart Driver(CV) 200W

Dimensions (mm)

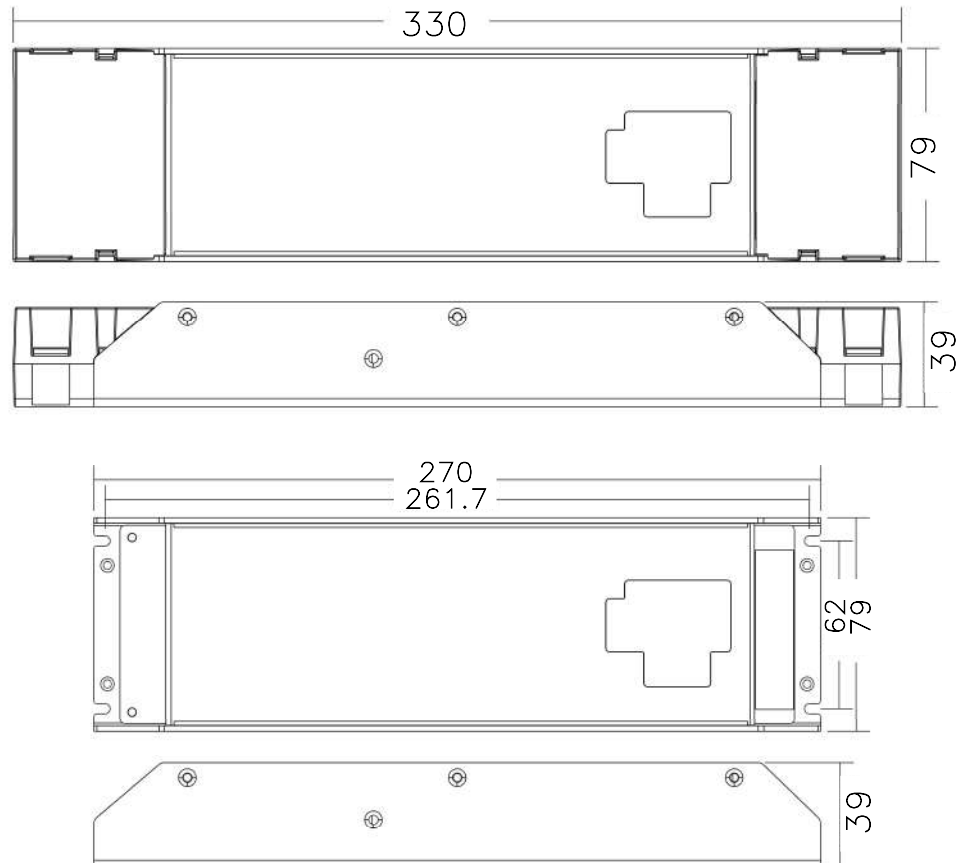

Wiring Diagram

