



Material	LED mounted on flexible PCB in silicone jacket	Max. Continuous Length	5m
Driver	Remote Driver	Control Options	On-off, DALI, 0-10, DMX (Via Remote Driver)
Life Time	50,000 hours, L70 @ 25°C	Factory Supplied Cable	2C x 0.5mm², L=0.2m (Monochrome)
Ambient Temperature	-25°C ~ 60°C	Weight	0.2 kg/m
IP Rating	65		
CRI	≥ 90		
Min. Cutting Unit	25mm		





LED STRIP LIGHT



Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
5W/m	2700K (300lm/m)	110°	24Vdc
	3000K (310lm/m)		
	4000K (315lm/m)		
	5700K (310lm/m)		
	5700K (310lm/m)		
10W/m	2700K (600lm/m)		
	3000K (620lm/m)		
	4000K (630lm/m)		
	5700K (620lm/m)		

Dimension

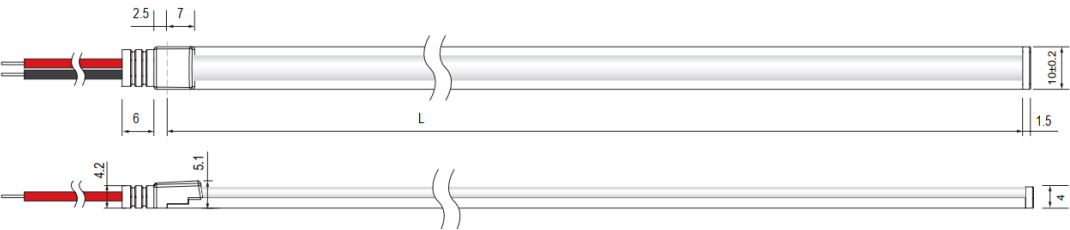


LED STRIP LIGHT




Accessories



Aluminum Profile
L=1000mm



Mounting Clips



Bendable Profile
L=1000mm



Recessed Profile
L=1000mm



Anti-glare Profile
L=1000mm



Input Connector