

LED Inground



TIS INL210

Application


Inground luminaire is designed to accent or highlight trees,walls,columns,signboards,etc.

Specification


Housing	Die-cast aluminium body with grade 316 stainless steel flange
Finishing	Matt finished
Lens	Clear toughened glass
Gasket	Silicone rubber
Cable Entry	Nickel brass cable gland
Dimension	Dia.115x150 mm.
Cut Out	Dia.110 mm.
Mounting	Recessed in block out made of polypropylene
Power	5W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
Luminaire Output	225 lm
Beam Angle	24/60 degree
Control Gear	Separate driver
Power Supply	220-240VAC,50Hz
Insulation Class	III
IP Rating	67
Luminaire Lifetime	25,000 hrs.
Equivalent	MR16 35W

Ordering Data

Model	Watt
INL210-5LED	5W

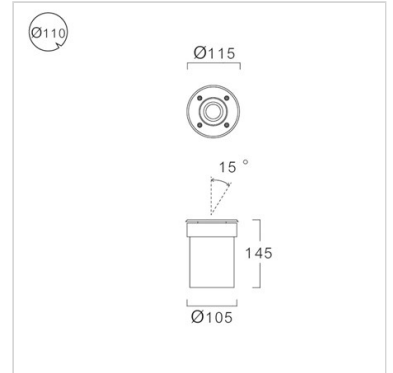

Related Products



Honey comb

