

LED
NEONFLEX

SLN266 (Monochrome / Dynamic White)

Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 55°C
IP Rating	68
CRI	≥ 80
Min.Cutting Unit	Monochrome : 50mm Dynamic White : 83.3mm
Max. Continuous Length	Monochrome : 15m (12W/m) Monochrome : 10m (16.5W/m)
Control Options	Monochrome : 1-10V, DALI, DMX (Via Remote Driver) Dynamic White : DMX
Weight (kg)	0.5 kg/m



 MONO-CHROME

 DYNAMIC WHITE


 IP68

 24 VDC

 DMX 512

 1-10V


 DALI

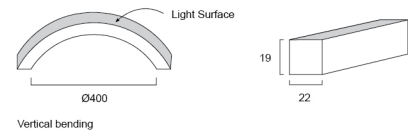

SLN266-VB


Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	2700K (920lm/m)	120°	24 Vdc
	3000K (920lm/m)		
	3500K (950lm/m)		
	4000K (950lm/m)		
	5700K (950lm/m)		
	Dynamic white		
	2200K-5700K (610lm/m)		
16.5W/m	2700K (1300lm/m)		
	3000K (1300lm/m)		
	3500K (1400lm/m)		
	4000K (1400lm/m)		
	5700K (1400lm/m)		






SLN266-HB

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	2700K (720lm/m)	120°	24 Vdc
	3000K (720lm/m)		
	3500K (750lm/m)		
	4000K (750lm/m)		
	5700K (750lm/m)		
	Dynamic white		
	2200K-5700K (550lm/m)		
16.5W/m	2700K (1000lm/m)		
	3000K (1000lm/m)		
	3500K (1100lm/m)		
	4000K (1100lm/m)		
	5700K (1100lm/m)		

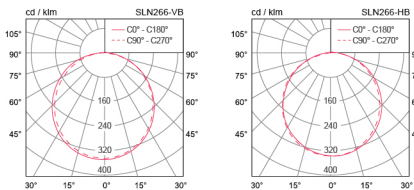


Accessories


Injection-Moulded connector (E/S/B) + End cap




E = END



S = Side




B = Button




End Cap

Aluminium Profile




Serrated
Aluminium Profile



Recess Serrated
Aluminium Profile





Horizontal Bendable
Serrated Aluminium Profile
for SLN266-HB



Serrated Aluminium Profile
200mm for SLN266-VB




Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 55°C
IP Rating	68
CRI	≥ 80
Min.Cutting Unit	RGB : 83.3mm RGBW : 83.3mm
Max. Continuous Length	RGB : 10m RGBW : 8m
Control Options	DMX (Via Remote Driver)
Weight (kg)	0.5 kg/m

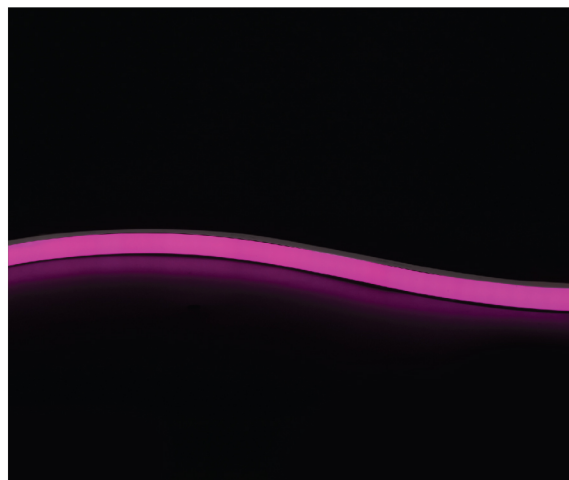


SLN266-VB

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	RGB (410lm/m)	120°	24Vdc
15W/m	RGBW (625lm/m)		

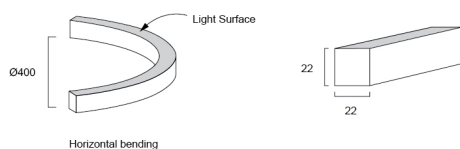


SLN266-HB

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	RGB (330lm/m)	120°	24Vdc
15W/m	RGBW (505lm/m)		

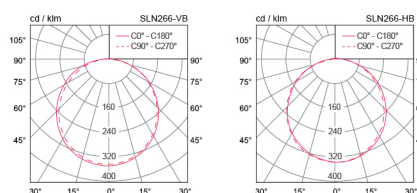


Accessories


Injection-Moulded connector (E/S/B) + End cap




E = END



S = Side






B = Button



End Cap



Aluminium Profile

Serrated
Aluminium ProfileRecess Serrated
Aluminium ProfileHorizontal Bendable
Serrated Aluminium Profile
for SLN266-HBSerrated Aluminium Profile
200mm for SLN266-VB

LED
NEONFLEX


SLN266 (Pixel)

Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 55°C
IP Rating	68
CRI	≥ 80
Min.Cutting Unit	166.7mm
Max. Continuous Length	Monochrome : 10m Dynamic White : 15m RGB : 12m RGBW : 8m
Control Options	DMX
Address per meter	6
Weight (kg)	0.5 kg/m

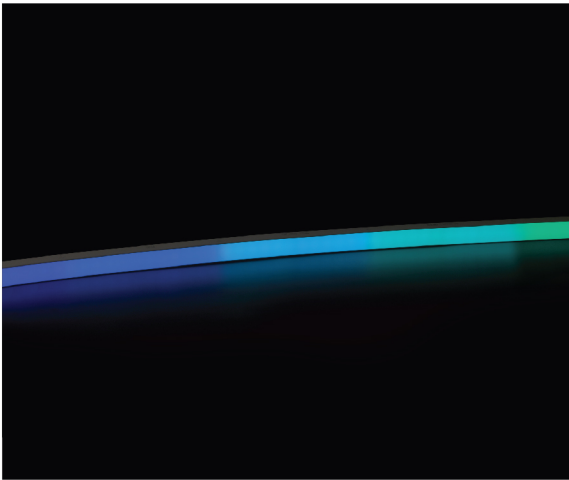


SLN266-VB

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	RGB (320lm/m)	120°	24 Vdc
	Dynamic white 2200K-5700K (580lm/m)		
15W/m	2700K (650lm/m)	120°	24 Vdc
	3000K (650lm/m)		
	3500K (700lm/m)		
	4000K (700lm/m)		
	5700K (700lm/m)		
	RGBW (500lm/m)		

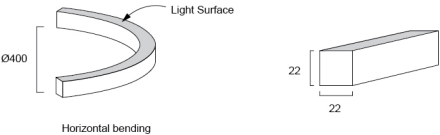


SLN266-HB

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	RGB (255lm/m)	120°	24 Vdc
	Dynamic white 2200K-5700K (470lm/m)		
15W/m	2700K (520lm/m)	120°	24 Vdc
	3000K (520lm/m)		
	3500K (560lm/m)		
	4000K (560lm/m)		
	5700K (560lm/m)		
	RGBW (400lm/m)		

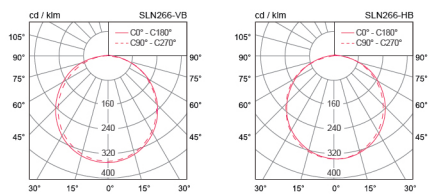


Accessories


Injection-Moulded connector (E/S/B) + End cap




E = END



S = Side




B = Button




End Cap

Aluminium Profile




Serrated
Aluminium Profile



Recess Serrated
Aluminium Profile



Horizontal Bendable
Serrated Aluminium Profile
for SLN266-HB



Serrated Aluminium Profile
200mm for SLN266-VB



Aluminium Profile

Serrated Aluminium Profile



Recess Serrated Aluminium Profile



Bendable Serrated Aluminium Profile

