


SLX6120-UL

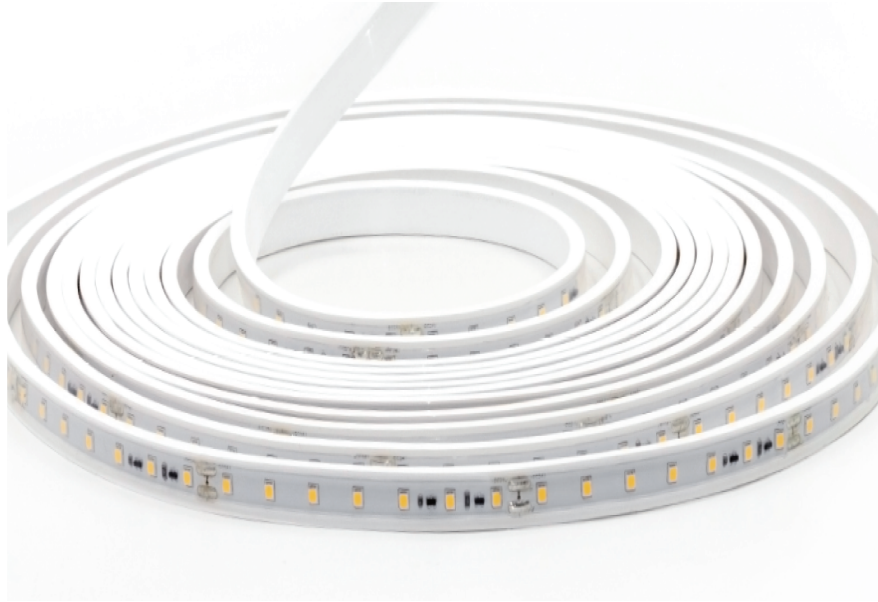

LED ULTRA LONG LINEAR FLEX

SLX6120-UL Series is a ribbon light high performance LED strip. The durable, but-flexible product features a heavier copper board core for better heat dissipation and over long runs. Available in single row configurations ranging from 120 LEDs per meter with multiple power feed. SLX6120-UL Series feature outstanding color consistency with single color binning and CRI up to 80.

**Material :**

LED mounted on flexible PCB in silicone jacket

Driver :

Remote 24 Vdc constant voltage driver

life time : 50,000 hrs, (L70)

Ambient Temperature : -25° C -50° C

IP Rating : 65

Ra : ≥ 80

Min. Cutting Unit : 100 mm (6W), 50 mm (12W)




Max. Continuous Length : 20 m(6W,12W)

Factory Supplied Cable :

2 x 0.5 mm², L = 0.35 m

Control : DMX, on-off, 0-10V, DALI

Weight (kg) : 0.3 kg/m

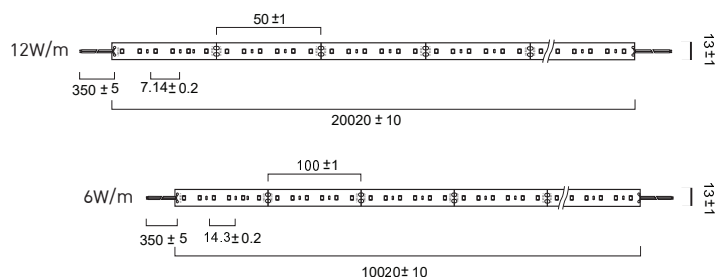

Accessories



ALS1616
W=16mm H=16mm L=1000mm



ALS2023
W=19.5mm H=22.7mm L=1000mm



ALS2016A
W=19.5mm H=20mm L=1000mm



ALS2016B
W=19.5mm H=20mm L=1000mm

Model	Watt	CCT. (K)	Beam Angle	Color	Input (V)
SLX6120-UL	6W {550lm/m}*	2700K	110°	-	24 Vdc
	12W {1100lm/m}*	3000K			
		4000K			
		6500K			

* Lumen refers to 3000K