

# LED Pendant

## TIS LINE P

### Application



Pendant luminaire is designed to use for office buildings, book stores, discount stores, shopping centers, convenience stores, residences, hotels, restaurants, hospitals, etc.

### Specification

<b>Housing</b>	Extruded aluminium
<b>Finishing</b>	Powder coated in grey, white or black
<b>Diffuser</b>	Acrylic (PMMA)
<b>Mounting</b>	Suspension wire
<b>Power</b>	P60 : 11/14/16/19W P120 : 22/28/32/38W
<b>Light Source</b>	LED Module
<b>Colour Temperature</b>	3000/4000/6500K
<b>Luminaire Output</b>	P60 : 11W : 1150 lm, 14W : 1450 lm P60 : 16W : 1700 lm, 19W : 1950 lm P120 : 22W : 2300 lm, 28W : 2900 lm P120 : 32W : 3400 lm, 38W : 3900 lm
<b>Control Gear</b>	Built-in driver
<b>Power Supply</b>	220-240VAC, 50Hz
<b>Power Factor</b>	>0.9
<b>Insulation Class</b>	I
<b>IP Rating</b>	20
<b>Luminaire Lifetime</b>	30,000 hrs.
<b>Remarks</b>	Option 1.Box with Transparent Wire 1.5m 2.Luminaire connector (Continued)

### Ordering Data

Model	Watt
LINE P60-11LED	11W
LINE P60-14LED	14W
LINE P60-16LED	16W
LINE P60-19LED	19W
LINE P120-22LED	22W
LINE P120-28LED	28W
LINE P120-32LED	32W
LINE P120-38LED	38W

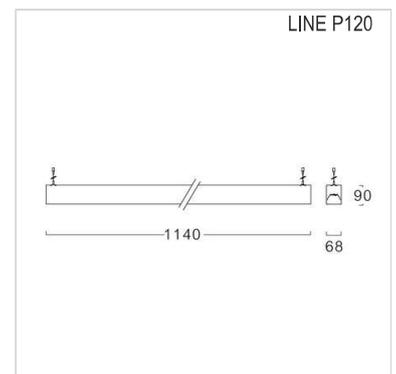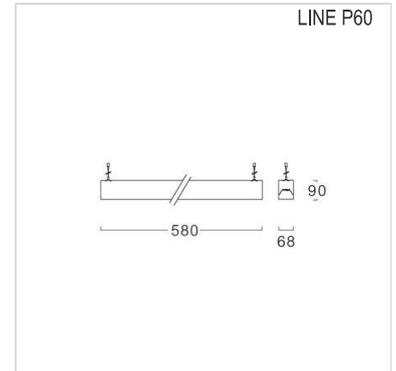

### Related Products

