

LED Surface Downlight



TIS SAL102J

Application

Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification

Housing

Die-cast and extruded aluminium
 Primary reflector : Vacuum aluminum plating PC/ High quality lens
 4 different secondary reflectors are available for various applications
 WR (front reflector white)
 BR (front reflector black)
 MB (front reflector mirror black)
 MI (front reflector mirror chrome)
 Powder coated in white or black

Finishing

Mounting

Power

Light Source

Colour Temperature

CRI

Lamp Output

Surface
 14/20/23W
 LED COB
 3000/4000/5000K
 >90/ >90/ >80

Luminaire Output

14W : 1540/1660/1805 lm *
 20W : 2200/2370/2575 lm **
 23W : 2635/2845/3090 lm **

Beam Angle

14W : 10/15/26/36/45/55 Degree
 20/23W : 26/36/45/55 Degree

UGR

Control Gear

Power Supply

Power Factor

Insulation Class

IP Rating

Luminaire Lifetime

Remarks

<19

Built-In Driver

220-240VAC,50Hz

>0.9

I

20






40,000 hrs

* Value at 15 Degree

** Value at 36 Degree

Ordering Data

Model	Watt
SAL102J/MI/WH-14LED	14W
SAL102J/MI/WH-20LED	20W
SAL102J/MI/WH-23LED	23W

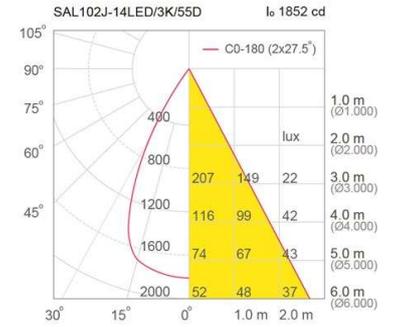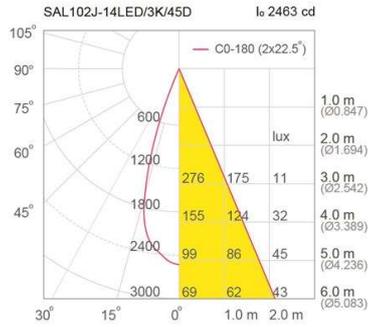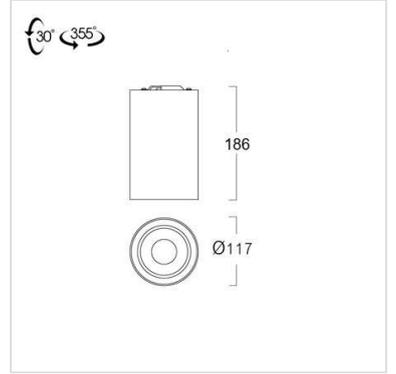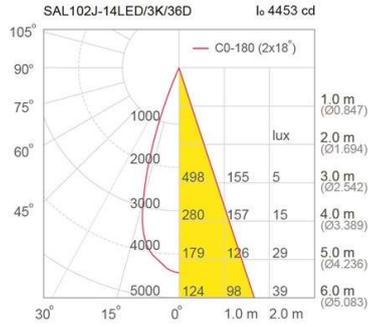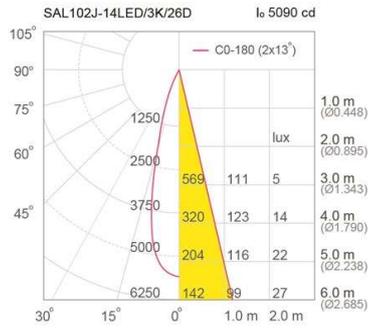

Related Products





SAL102J/BK



20W

23W



26D



36D



45D



55D

