

LED Accent



 TIS **GSL130**

Application


Accent Luminaire is designed for a wide variety of architectural and landscape applications to accent or highlight specific architectural and landscape features, etc.

Specification

Housing	Die-cast aluminium
Finishing	Powder coated in black
Lens	Clear toughened glass
Gasket	Silicone rubber
Dimension	27x62x49 mm.
Mounting	Ground spike
Power	4W
Light Source	LED-COB
Colour Temperature	3000K
Luminaire Output	180 lm
Beam Angle	15/20/30 degree
Control Gear	Separate switching power supply
Power Supply	220-240VAC, 50Hz
Insulation Class	III
IP Rating	66
Luminaire Lifetime	50,000 hrs.
Equivalent	JC 20W

Ordering Data

Model	Watt
GSL130-4LED	4W

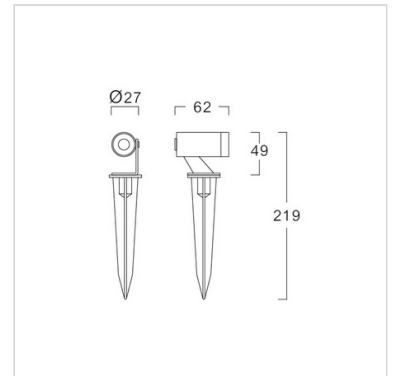

Related Products



Tree strap

