

LED Floodlight / Spotlight



FLL201/C/GS

Application





Floodlight is designed to illuminate building facade, building security, indoor and outdoor stadiums, monuments, statues, exhibition halls, shopping centers, showrooms, display areas, residences, etc.

Specification


Housing	Die-cast aluminium
Finishing	Powder coated in black
Lens	Clear toughened glass
Gasket	Silicone rubber
Dimension	82x165x240 mm.
Mounting	Clamp with pipe (OD 48/60 mm.)
Power	5W
Light Source	LED-COB
Colour Temperature	3000/4000K
Luminaire Output	360 lm
Beam Angle	12/24/36 degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.35
Insulation Class	I
IP Rating	66
Luminaire Lifetime	30,000 hrs.
Equivalent	MR16 50W

Ordering Data

Model	Watt
FLL201/C/GS-5LED	5W

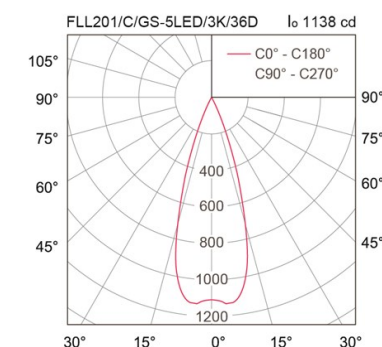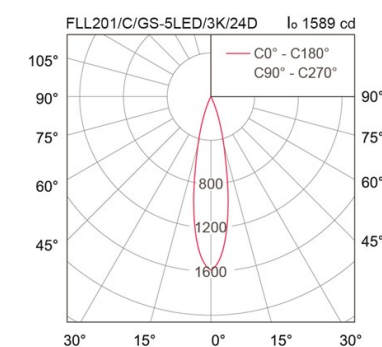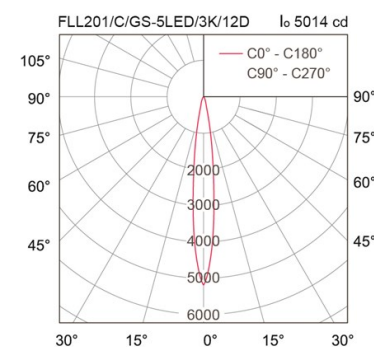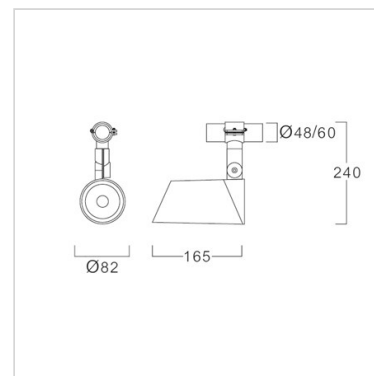

Related Products



Honey comb