

# LED Streetlight




TIS SLL651

## Application

Streetlight is designed to illuminate residences, streets, access roads, parking lots, highways, expressways, industrial areas, etc.

## Specification

<b>Housing</b>	Die-cast aluminium
<b>Front Cover</b>	Clear toughened glass
<b>Finishing</b>	Powder coated in grey
<b>Lens</b>	Polycarbonate
<b>Gasket</b>	Silicone rubber
<b>Dimension</b>	256x599x141 mm.
<b>Mounting</b>	Side entry or straight entry pole with OD 60x100 mm. spigot
<b>Power</b>	105/125W
<b>Light Source</b>	LED Module
<b>Colour Temperature</b>	4000/5700K
<b>Luminaire Output</b>	105W : 15750 lm 125W : 18750 lm
<b>Control Gear</b>	Built-in driver
<b>Dimming Method</b>	1-10V (optional)
<b>Power Supply</b>	220-240VAC, 50Hz
<b>Power Factor</b>	>0.95
<b>Insulation Class</b>	I
<b>IP Rating</b>	66
<b>Luminaire Lifetime</b>	50,000 hrs.

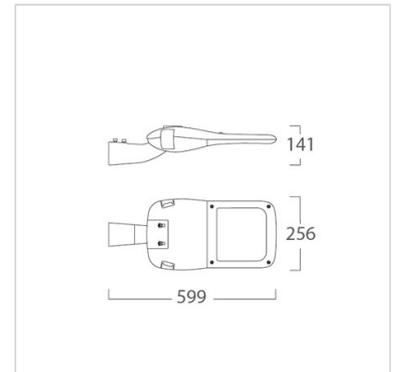

## Ordering Data

Model	Watt
SLL651-105LED	105W
SLL651-125LED	125W

