

LED Multi-Recessed Downlight



TIS RSAM76J/T

Application




Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification

Housing	Die-cast aluminium Trimless
Description	4 different lamp heads are available for various applications WR (front reflector white) BR (front reflector black) MB (front reflector mirror black) MI (front reflector mirror chrome) Powder Coated in white
Finishing	Recessed
Mounting	1x4-8W (1 lamp) 2x4-8W (2 lamps)
Power	LED-MR16 GX5.3
Light Source	2700-6500K
Lamp Holder	6W : 2700/3000/4000/6500K : 550 lm 7W : 2700K : 550 lm 7W : 3000K : 600 lm
Colour Temperature	Separate magnetic or electronic transformer
Lamp Output	220VAC, 50Hz (Magnetic transformer) 220-240VAC, 50Hz (Electronic transformer is available as option)
Control Gear	>0.9
Power Supply	II
Power Factor	20
Insulation Class	6W : 15,000 hrs. 7W : 25,000 hrs.
IP Rating	MR16 35 - 50W
LED Lifetime	
Equivalent	

Ordering Data

Model	Watt
RSAM76J/T/BR/WH-1xXXLED MR16	4-8W
RSAM76J/T/MB/WH-1xXXLED MR16	4-8W
RSAM76J/T/MI/WH-1xXXLED MR16	4-8W
RSAM76J/T/WR/WH-1xXXLED MR16	4-8W
RSAM76J/T/BR/WH-2xXXLED MR16	8-16W
RSAM76J/T/MB/WH-2xXXLED MR16	8-16W
RSAM76J/T/MI/WH-2xXXLED MR16	8-16W
RSAM76J/T/WR/WH-2xXXLED MR16	8-16W

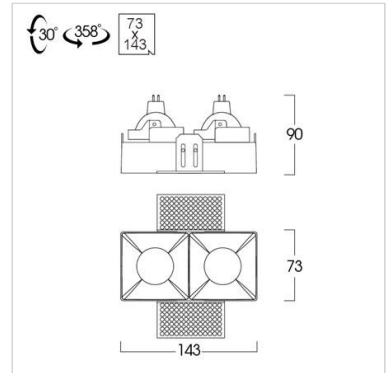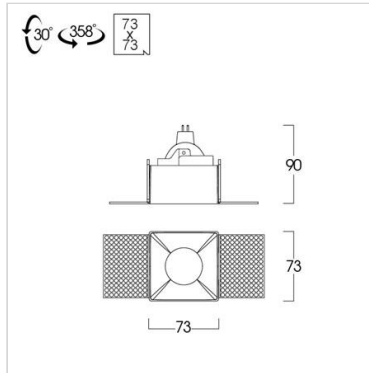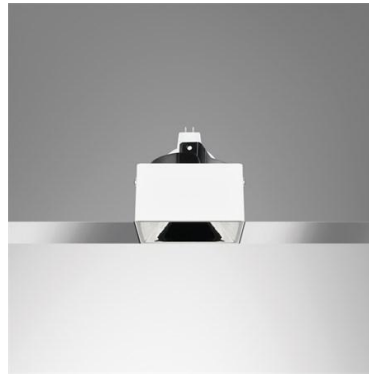

Related Products

