



ZENSE Smart Driver(CV) 75W




- Wireless smart control by L&E Application “Zense+”
- Bluetooth mesh Protocol, Low power consumption
- Maximum 10m operating range between each nodes
- Compatible with Single color/ CCT Tunable/ RGB/ RGBW LED Strip light (Selectable by APP)

Specification

Model	ZDG2-4C-BT-SR-CV-75-RGBW-ID-IA
Connected Load	Constant Voltage Load
Input Voltage	220-240Vac, 50/60Hz
Output Voltage	24Vdc
Output Current	Max. 3.12A/CH Ch1+Ch2+Ch3+Ch4=3.12A
Output Channel	4Channels
Standby Power	0.5W
Dimmable Range	0.1-100%
IP Rating	IP20
Cover	PC
Ambient Temperature	-20°C ~ 45°C
Max. Casing Temperature	85°C
Dimension	306.6x43x30mm


Function Introduction

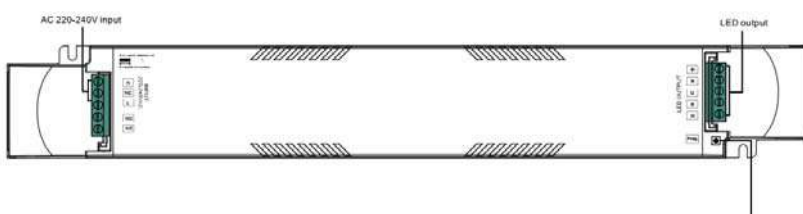


Program Key: short press to switch on/off load,
press and hold down to increase/decrease light intensity

ZENSE Smart Driver(CV) 75W

Dimensions (mm)

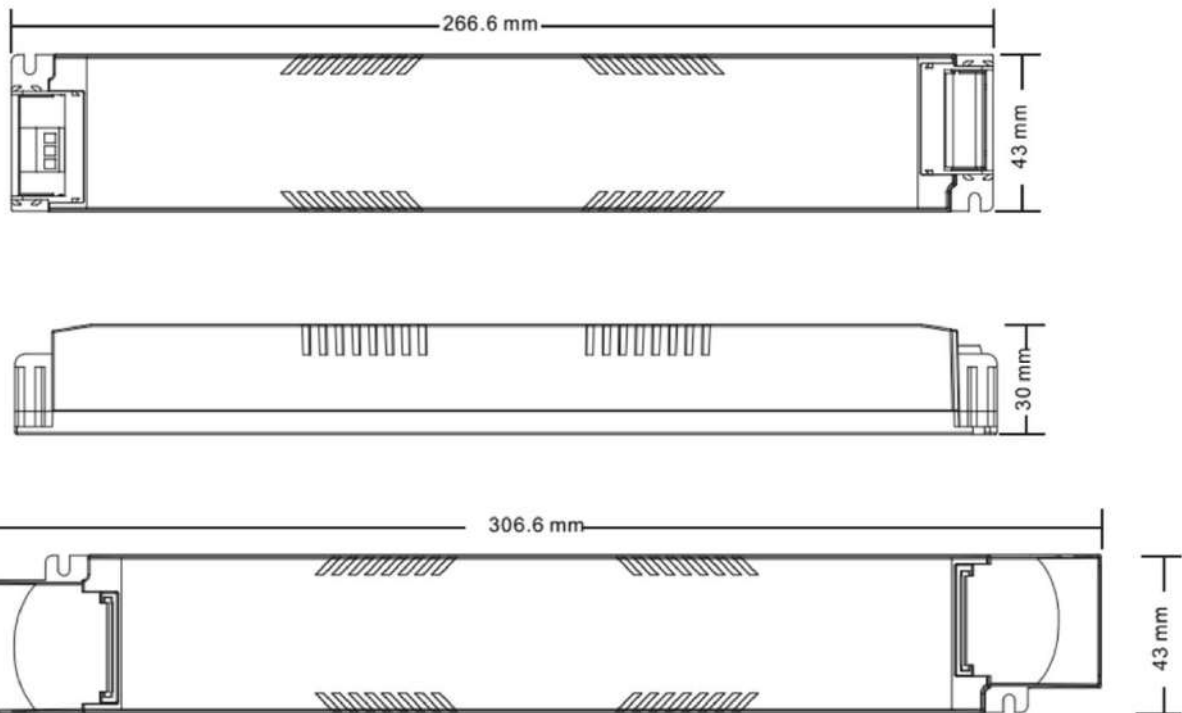

Wiring Diagram

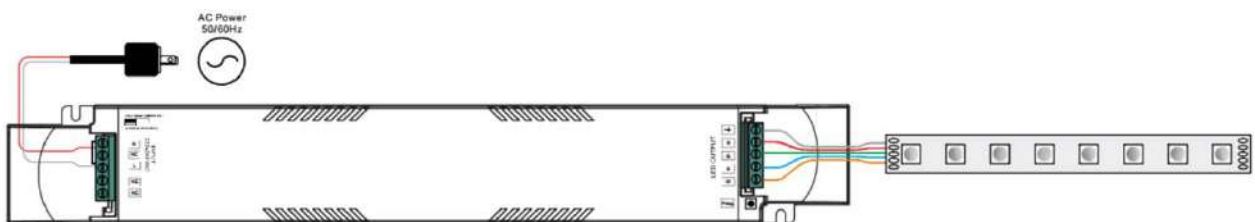

Channel	DIM	CCT	RGBW
1	1-	WW-	R-
2	2-	CW-	G-
3	3-	WW-	B-
4	4-	CW-	W-