

LED Multi-Recessed Downlight



TIS RSFM83

Application



Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification


Housing	Die-cast aluminium
Description	4 different color matching are available for various applications WH : lamp head white , trim white BK : lamp head black , trim black WH/BK : lamp head white , trim black BK/WH : lamp head black , trim white Powder Coated in white/black
Finishing	Recessed
Mounting	Recessed
Power	1x4-8W (1 lamp) 2x4-8W (2 lamps)
Light Source	LED-MR16
Lamp Holder	GX5.3
Colour Temperature	2700-6500K
Lamp Output	6W : 2700/3000/4000/6500K : 550 lm 7W : 2700K : 550 lm 7W : 3000K : 600 lm
Control Gear	Separate magnetic or electronic transformer
Power Supply	220VAC,50Hz (Magnetic transformer) 220-240VAC,50Hz (Electronic transformer is available as option)
Power Factor	>0.9
Insulation Class	II
IP Rating	20
LED Lifetime	6W : 15,000 hrs. 7W : 25,000 hrs.
Equivalent	MR16 35 - 50W

Ordering Data


Model	Watt
RSFM83/WH-1xXXLED-MR16	4-8W
RSFM83/WH-2xXXLED-MR16	8-16W

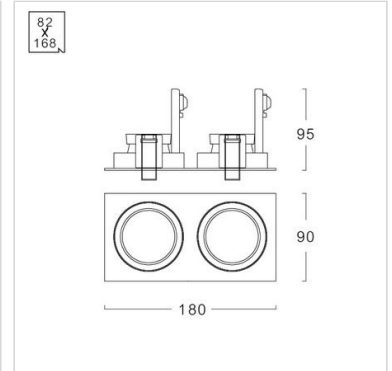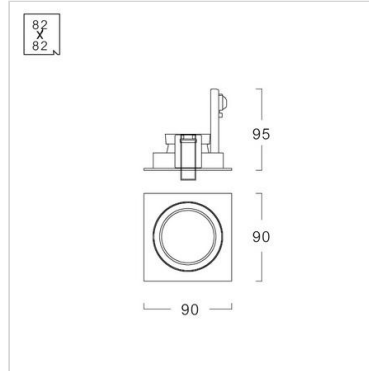

Related Products



Honey comb




Filter



Anti glare




Hood




RSFM83/BK-1xLED MR16



RSFM83/WH/BK-1xLED MR16



RSFM83/BK/WH-1xLED MR16



RSFM83/BK-2xLED MR16

