

LED Pendant



TIS PDL80K

Application







Pendant luminaire is designed to use for office buildings, book stores, discount stores, shopping centers, convenience stores, residences, hotels, restaurants, hospitals, etc.

Specification

Housing	Die-cast and extruded aluminium
Finishing	Powder coated in white or black
Mounting	suspension wires lenght 1.50 m.
Power	14/18/20/23W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
LED Output	14W : 1540/1660/1805 lm 18W : 2062/2226/2418 lm 20W : 2200/2370/2575 lm 23W : 2635/2845/3090 lm
Luminaire Output	14W : 1377/1487/1611 lm* 18W : 1709/1846/2000 lm* 20W : 1936/2091/2265 lm** 23W : 2305/2490/2697 lm**
Beam Angle	14/18W : 10/15/20/36/50 Degree 20/23W : 20/26/38/50 Degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
LED Lifetime	40,000 hrs.
Remarks	* Value at 36 Degree ** Value at 38 Degree

Ordering Data


Model	Watt
PDL80K/WH-14LED	14W
PDL80K/WH-18LED	18W
PDL80K/WH-20LED	20W
PDL80K/WH-23LED	23W

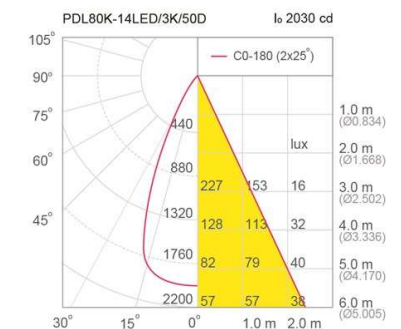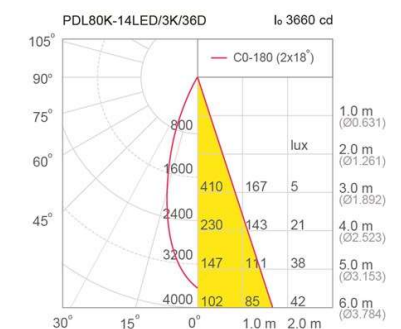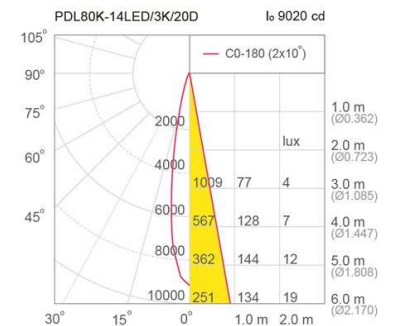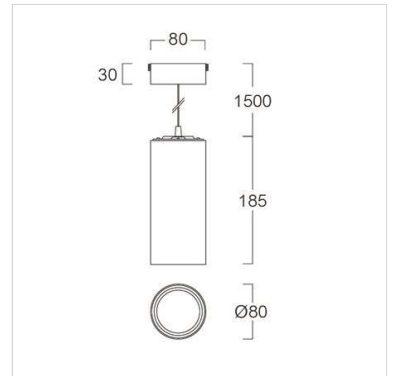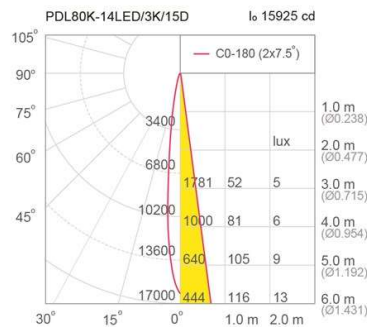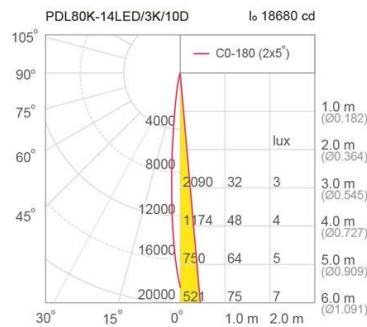

Related Products



PDL80K/BK




Honey Comb

18W




20W

23W




10D






18W: 15D
20/23W : 20D

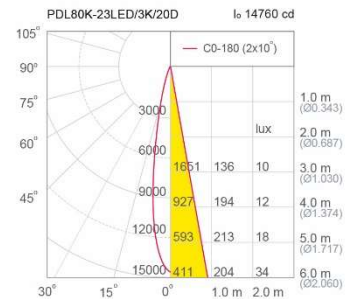

18W : 20D
20/23W : 26D

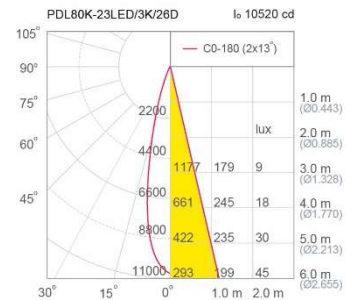

18W : 36D
20/23W : 38D

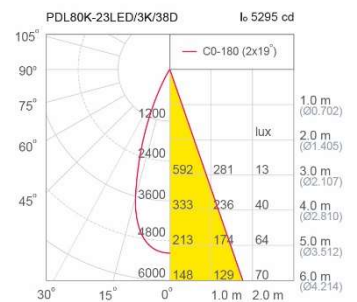

50D

