

LED Floodlight / Spotlight



TIS FLL221/S/GS

Application





Floodlight is designed to illuminate building facade, building security, indoor and outdoor stadiums, monuments, statues, exhibition halls, shopping centers, showrooms, display areas, residences, etc.

Specification

Housing	Die-cast aluminium
Finishing	Powder coated in black
Lens	Clear toughened glass
Gasket	Silicone rubber
Dimension	162x300x198 mm.
Mounting	Surface
Power	30W
Light Source	LED-COB
Colour Temperature	3000/4000K
Luminaire Output	3000 lm
Beam Angle	15/24/40 degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.95
Insulation Class	I
IP Rating	66
Luminaire Lifetime	50,000 hrs.
Equivalent	MH 70W

Ordering Data

Model	Watt
FLL221/S/GS-30LED	30W

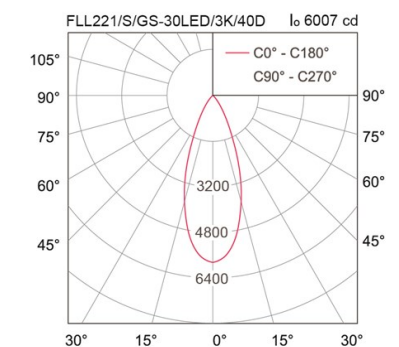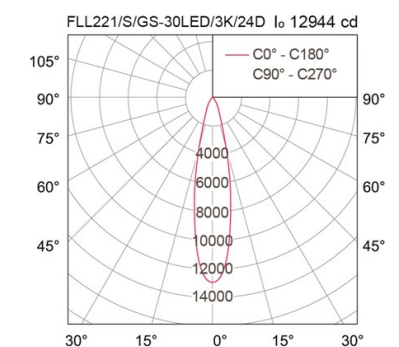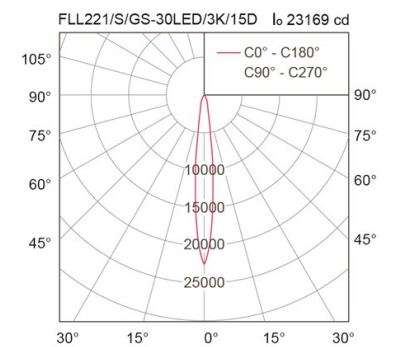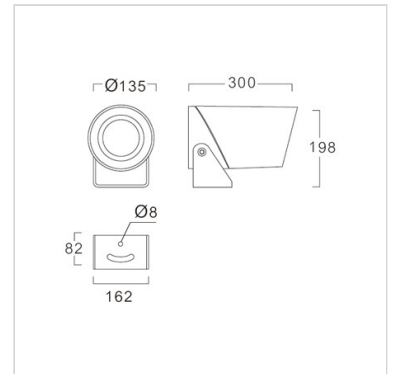


Related Products



Ground spike



Tree strap



Honey comb