



SIGMA 400

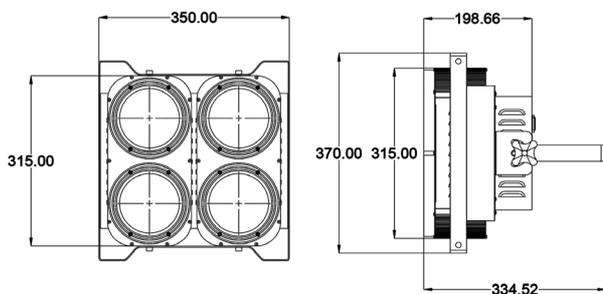

FULL (STATIC)

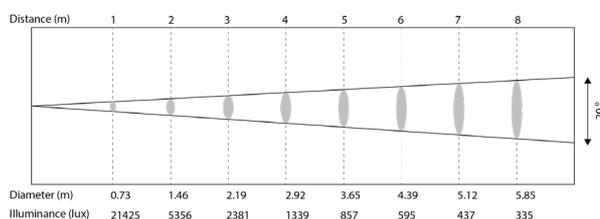


LED BLINDER 4X100W

- LED 4x100W
- Smooth dimming, Flicker-free

APPLICATIONS

Stage, Theatre, Studio, Events, Concert, Club, Bar, Restaurant, Hotel, Mall

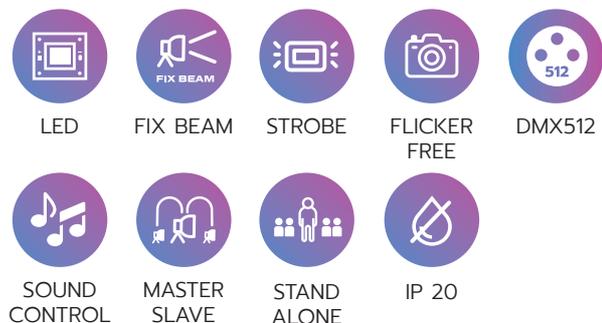

SPECIFICATIONS

Housing :	Aluminium
Finishing :	Black
Power Consumption :	400W
Operating Voltage :	100-240 V AC, 50-60 Hz
Power Connection :	Powercon IN/OUT
Signal Connection :	XLR 3 Pin IN/OUT,
IP Rating :	20
Weight (kg) :	8.5 kg
Size (WxHxD) :	350 x 334 x 315 mm
Source :	LED-white-4x100W
Lamp Color :	3200K, 5600K, 3200-5600K
Beam Angle :	20°
Control Gear :	Built-in driver
Control Mode :	DMX512, Auto Programs, Master-Slave, Stand-alone, Sound Control
Features :	Dimmer, Strobe, Flicker-free
DMX Channels :	2, 6, 12 CH (Tunable Model)
Accessories :	Safety Sling (Included)



MODEL



GAMMA T



GAMMA R

Source :	10W/20W/28W/37W	10W/20W/28W
Lamp Color :	2700K, 3000K, 4000K, 2700-6000K	2700K, 3000K, 4000K, 2700-6000K
Beam angle :	15°- 36° (Manual Zoom), 55°	15°- 36° (Manual Zoom), 55°
Control Mode :	Knob Dim/Dali/1-10V/IOT	Dali/1-10V/IOT
Features :	Dimmer, Zoom, Gobo Slot Size(10W-19.7mm/20W-24.5mm/28&37W-31.2mm), Focus, Shutter Frame	Dimmer, Zoom, Gobo Slot Size(10W-19.7mm/20W-24.5mm/28W-31.2mm), Focus, Shutter Frame
IP Rating :	20	20