

LED IP Surface Downlight



TIS ISDL2020

Application

Surface downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreational centers, museums, etc.

Specification






Housing	Die-cast and extruded aluminium
Finishing	Powder coated in black
Mounting	Ceiling
Power	40/44W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	40W : 4665/4995/5270 lm 44W : 5110/5470/5830 lm
Luminaire Output	40W : 4032/4314/4556 lm * 44W : 4328/4631/4934 lm *
Beam Angle	24/36/70 Degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	65
LED Lifetime	40,000 hrs.
Equivalent	40W : MH 100W 44W : MH 150W

Remarks

Install on ceiling only
* Value at 24 Degree

Ordering Data

Model	Watt
ISDL2020/BK-40LED	40W
ISDL2020/BK-44LED	44W

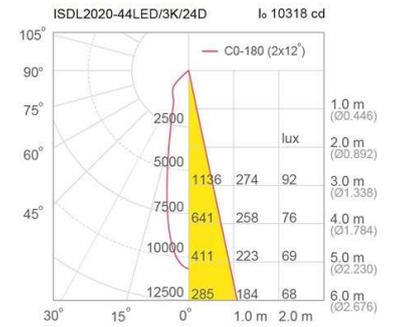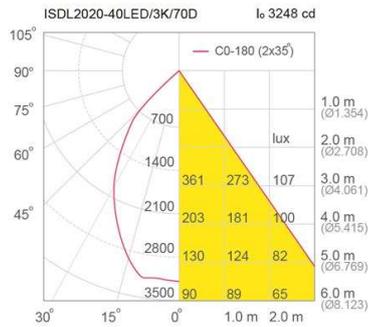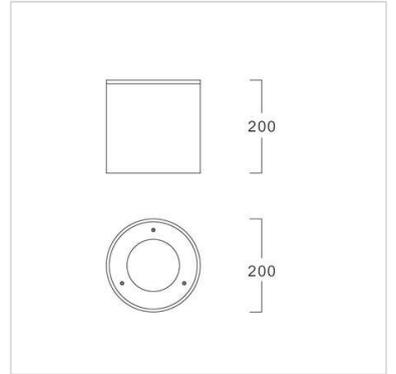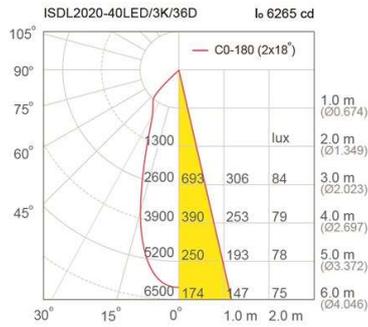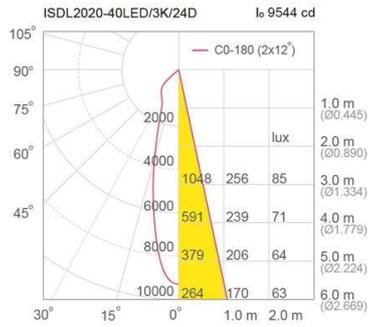

Related Products

