

LED Streetlight




TIS SLL436

Application

Streetlight is designed to illuminate residences, streets, access roads, parking lots, highways, expressways, industrial areas, etc.

Specification

Housing	Die-cast aluminium
Front Cover	Clear toughened glass
Finishing	Powder coated in grey
Lens	Acrylic (PMMA)
Gasket	Silicone rubber
Dimension	340x655x81 mm.
Mounting	Side entry pole or bracket arm with OD 60x100 mm. spigot
Power	175W
Light Source	LED Module
Colour Temperature	4000/5700K
Luminaire Output	21875 lm
Beam Angle	Street lighting distribution : SL8
Control Gear	Built-in driver
Dimming Method	1-10V (optional)
Power Supply	220-240VAC, 50Hz
Power Factor	>0.95
Insulation Class	I
IP Rating	66
Luminaire Lifetime	50,000 hrs.
Equivalent	HPS 400W

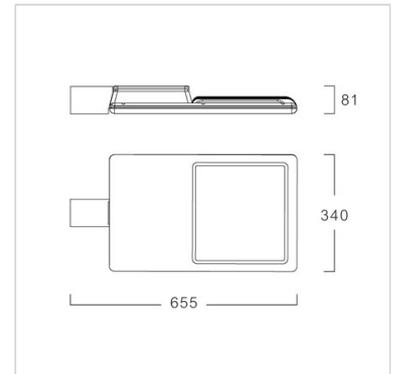

Ordering Data

Model	Watt
SLL436-175LED	175W

