

LED Floodlight / Spotlight



TIS FLL221/P/GS

Application



Floodlight is designed to illuminate building facade, building security, indoor and outdoor stadiums, monuments, statues, exhibition halls, shopping centers, showrooms, display areas, residences, etc.

Specification


Housing	Die-cast aluminium with zinc coated steel pole
Finishing	Powder coated in black
Lens	Clear toughened glass
Gasket	Silicone rubber
Dimension	135x300x245 mm.
Mounting	On 6m. height pole (OD 101mm.)
Power	30W (x4, 6 sets)
Light Source	LED Module
Colour Temperature	3000/5700K
Luminaire Output	3000 lm (x4, 6 sets)
Beam Angle	15/24/40 degree
Control Gear	Built-in driver
Power Supply	220-240VAC 50Hz
Power Factor	>0.95
Insulation Class	I
IP Rating	66
Luminaire Lifetime	50,000 hrs.
Equivalent	MH 70W (x4, 6 sets)

Ordering Data

Model	Watt
FLL221/P/GS-30LED	30W

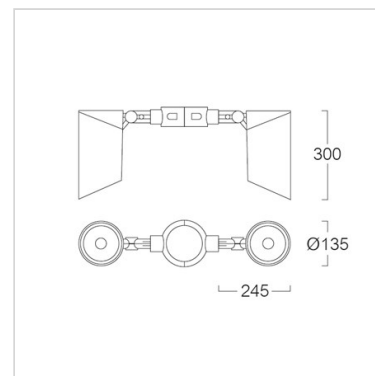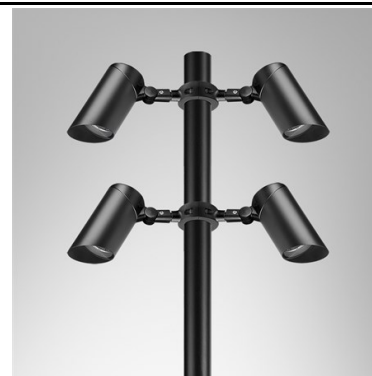

Related Products



Honey comb