

LED High Bay




 TIS HBL701

Application

Low-high bay is designed to use for shopping malls, supermarkets, discount stores, cloth shops, convenience stores, retail shops, garages, warehouses, storage areas, maintenance areas, production areas, etc.

Specification

Housing	Die-cast aluminium
Finishing	Powder coated in black
Lens	Polycarbonate
Gasket	Silicone rubber
Dimension	Dia.250x145 mm.
Mounting	Hook or chain suspension
Power	80/130W
Light Source	LED Module
Colour Temperature	5700K
Luminaire Output	80W : 12000 lm 130W : 19500 lm
Beam Angle	90 degree
Control Gear	Built-in driver
Power Supply	220-240VAC,50Hz
Power Factor	>0.95
Insulation Class	I
IP Rating	65
Luminaire Lifetime	50,000 hrs.
Equivalent	80W : MH 150W 130W : MH 250W

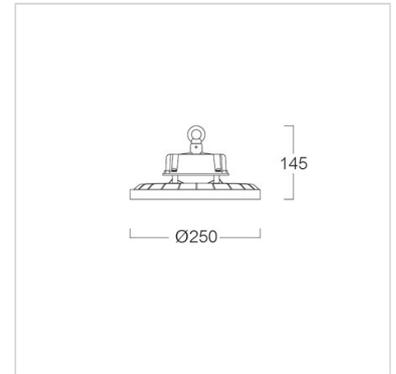

Ordering Data

Model	Watt
HBL701-80LED	80W
HBL701-130LED	130W

