

TIS ERDL140A

## Application


Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

## Specification

<b>Housing</b>	Die-cast Aluminium
<b>Finishing</b>	Powder coated in white
<b>Diffuser</b>	Opal
<b>Mounting</b>	Recessed
<b>Power</b>	14/20W
<b>Light Source</b>	LED-MODULE
<b>Colour Temperature</b>	3000/4000/5000K
<b>Lamp Output</b>	14W : 1500/1625/1776 lm 20W : 2142/2322/2538 lm
<b>Luminaire Output</b>	14W : 1305/1400/1500 lm 20W : 1860/2000/2150 lm
<b>Beam Angle</b>	90 degree
<b>Control Gear</b>	Separate driver
<b>Power Supply</b>	220VAC 50Hz
<b>IP Rating</b>	20
<b>Luminaire Lifetime</b>	40,000 hrs.
<b>Equivalent</b>	14W:CFL 2x14W 20W:CFL 2x18W

## Ordering Data

Model	Watt
ERDL140A/WH-20LED	20W

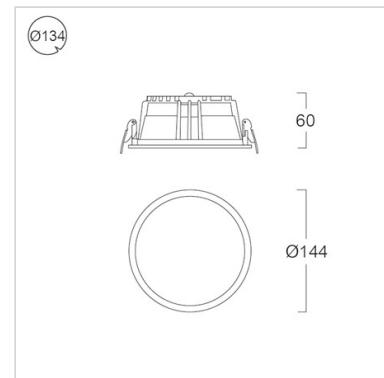

## Related Products



ERDL140B-14/20W



ERDL140C-14/20W

