

TIS IRDL100

Application


Recessed downlight is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, recreation centers, museums, etc.

Specification


| | |
|--------------------|------------------------|
| Housing | Die-cast aluminium |
| Finishing | Powder coated in white |
| Diffuser | Opal |
| Mounting | Recessed |
| Power | 10W |
| Light Source | LED-MODULE |
| Colour Temperature | 3000/4000/6500K |
| Luminaire Output | 860 lm |
| Beam Angle | 85 Degree |
| Control Gear | Separate driver |
| Power Supply | 220-240VAC,50Hz |
| Power Factor | >0.90 |
| Insulation Class | I |
| IP Rating | 65 |
| Luminaire Lifetime | 40,000 hrs. |

Ordering Data

| Model | Watt |
|------------------|------|
| IRDL100/WH-10LED | 10W |

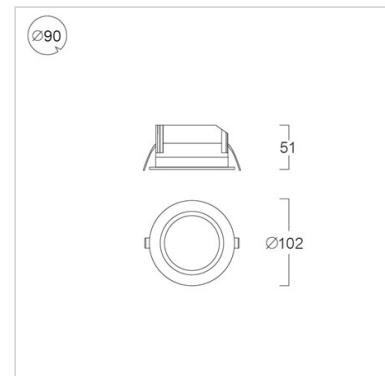

Related Products

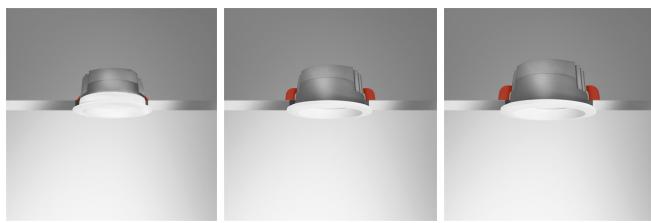

IRDL130-14/20W

IRDL170-23/30W

IRDL210-40/49W

