

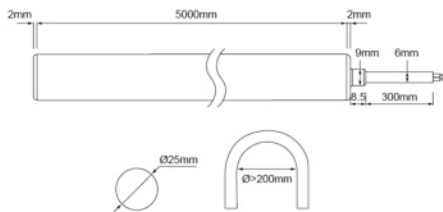


Material	LED mounted on flexible PCB in silicone jacket
Driver	Remote Driver
Life Time	50,000 hours, L70 @ 25°C
Ambient Temperature	-20°C ~ 50°C
IP Rating	65
CRI	≥ 90
Min.Cutting Unit	50mm
Max. Continuous Length	5m
Control Options	Monochrome : 1-10V, DALI, DMX (Via Remote Driver) Dynamic White : DMX (Via Remote Driver)
Weight (kg)	0.5 kg/m

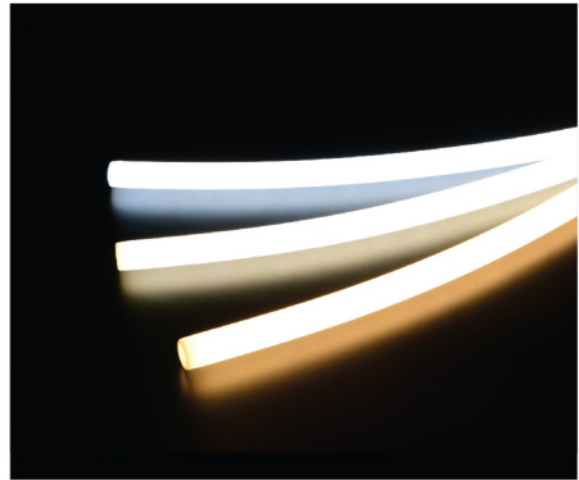


SLN360 (Monochrome / Dynamic White)

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
10W/m	2700K (517lm/m)	360°	24Vdc
	3000K (529lm/m)		
	3500K (542lm/m)		
	4000K (556lm/m)		
	6000K (586lm/m)		
	Dynamic white		
	2200K-5000K (517lm/m)		




Accessories


Injection-Moulded connector (E/S/B) + End cap



E = END



S = Side



End Cap



PC Profile

W = 30mm L = 1000mm H = 27.4mm



PC Mounting Clips

W = 30mm L = 20mm H = 27.4mm



Horizontal Lifting Clip



Concealed PC Mounting Clips



Connector for Side outlet



Connector