


LED GOB Kiosk

Splicing : Multiple screens can be spliced together for use.

Dimension (mm)

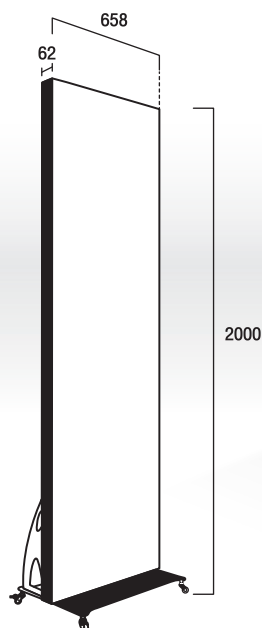

Accessories



HDMI Plug



Ribbon Cable



AC Plug



Receiving Card



Hub Card



Asyn Sending card



LED Module

Wireless & Plug and play



Product Description

Pixel Pitch (mm)	P2.5
Module Size (mm)	320×160
Module Resolution (pixels)	128×64
Cabinet Resolution (pixels/m2)	160,000
Brightness (cd/m2)	600-800
Viewing Angle	Horizontal 140°, Vertical 140°
Device Driver	1/32
Refresh Rate	≥3840Hz
Power Consumption (W/m2)	500/166
Frame Frequency	≥60Hz
Maintenance	Front Optional
Panel Weight (kg/m2)	40
Panel Size (mm)	658×2000×62
Gray Scale	≤14 bits
IP Rating	IP30

Lighting & Equipment Public Company Limited

539/2 ,16-17 Floor, Gypsum Metropolitan Tower,Sri-Ayudhya Rd., Rajthevee, Bangkok 10400 Tel. 02 248 8133



www.lighting.co.th



@lightingthailand



lightingthailand



L&E Channel

