

LED Pendant



TIS PDL100K

Application


Pendant luminaire is designed to use for office buildings,book stores,discount stores,shopping centers,convenience stores,residences,hotels,resturants,hospitals,etc.

Specification

Housing	Die-cast and extruded aluminium
Finishing	Powder coated in white or black
Mounting	suspension wires lenght 1.50 m.
Power	18/23/27W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
LED Output	18W : 2062/2226/2418 lm 23W : 2635/2845/3090 lm 27W : 3065/3300/3515 lm
Luminaire Output	18W : 1597/1725/1869 lm * 23W : 2491/2690/2915 lm** 27W : 2847/3046/3275 lm **
Beam Angle	20/30/50/60 Degree
Control Gear	Built-in driver
Power Supply	220-240VAC,50Hz
Power Factor	>0.9
Insulation Class	I
IP Rating	20
Lamp Lifetime	40,000 hrs.
Equivalent	18W : MH 20W 23W : MH 35W 27W : MH 70W
Remarks	* Value at 15 Degree ** Value at 30 Degree

Ordering Data


Model	Watt
PDL100K/WH-18LED	18W
PDL100K/WH-23LED	23W
PDL100K/WH-27LED	27W

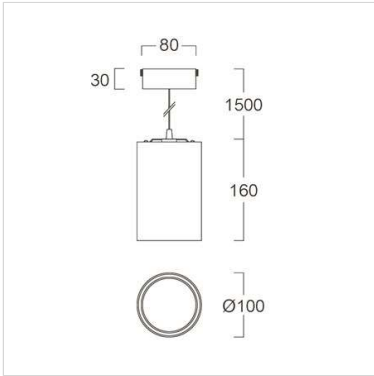

Related Products





PDL100K/BK

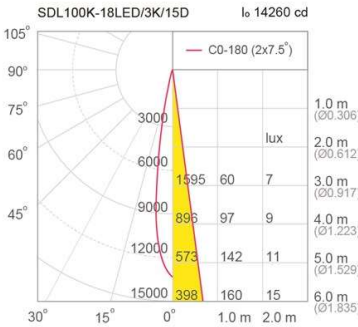



23W

27W



20D



30D



50D



60D

