




SAUNA SERIES


Safe & Reliable. Adopt built-in constant current design to control temperature rise, no need extra protection shade against high temperature. Versatile Installation. Indirect or direct lighting, horizontal or vertical bending. Ready & Convenient for Installation. Factory-assembled connector, integrated to the light body by machine. Ideal Lighting Continuity. Even spliced by multiple pieces of LED flex.






- Various dimension



- Bending optional

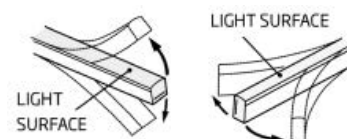




- 0-10V Dimmer, PWM
- Without additional programming
- Compatible with DMX protocol, only one channel occupied




Category	SLN261	SLN260	SLN264
Bending Direction	HB/VB	HB	HB
Voltage (V)	24	24	24
Lumen(lm/m)	285	200	230
Power (W/m)	6	6	6
Min. Cutting Length (mm)	55.6	83.3	83.3
LEDs Qty/m	106	72	72
Min. Bending Diameter (mm)	120	120	120
Max. Running Length (mm)	10 m	10 m	10 m



Distribution Curve

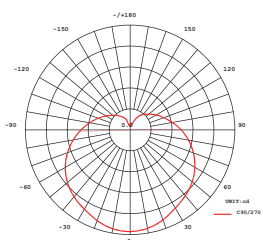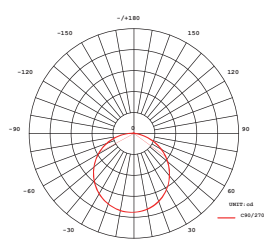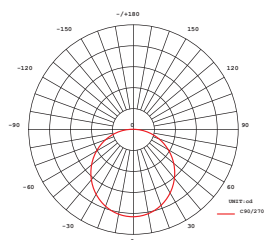

APPLICATION :


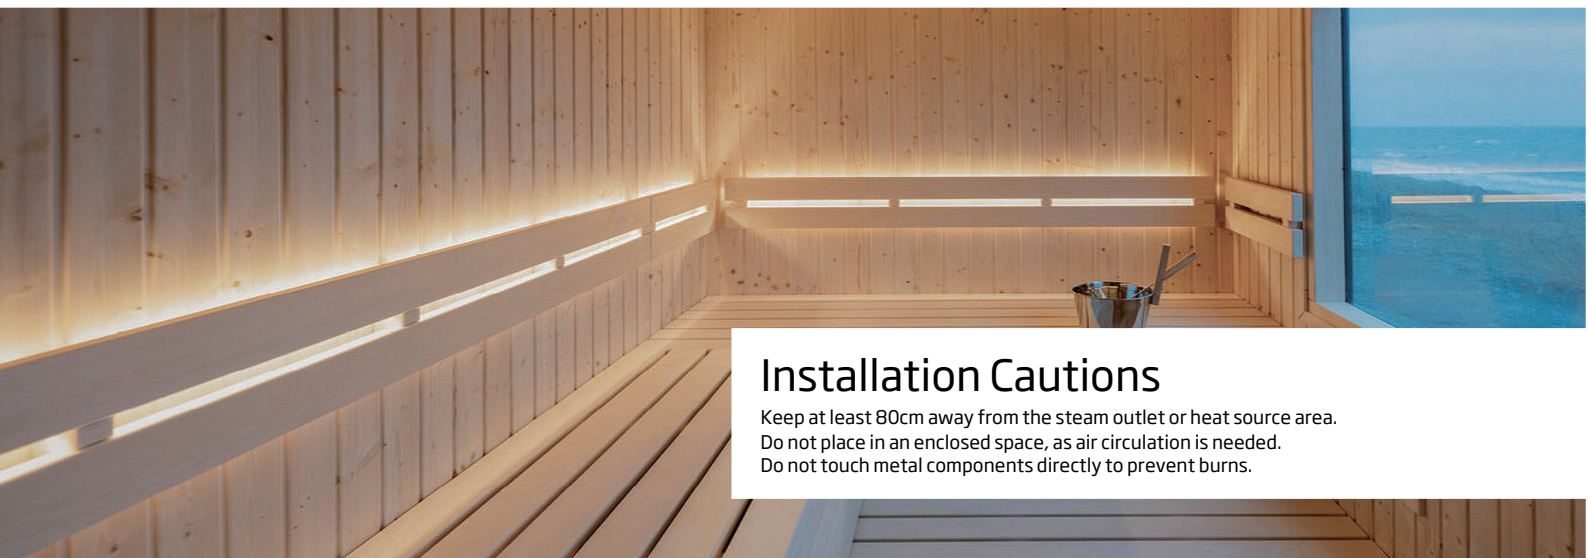


Installation Cautions



- Keep at least 80cm away from the steam outlet or heat source area.
- Do not place in an enclosed space, as air circulation is needed.
- Do not touch metal components directly to prevent burns.

Connector : :



SLN261

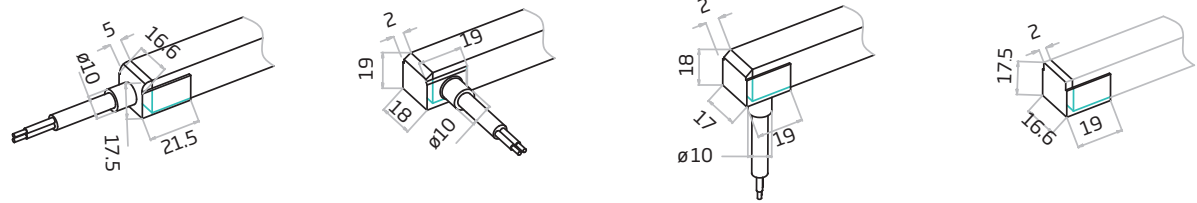

SLN260

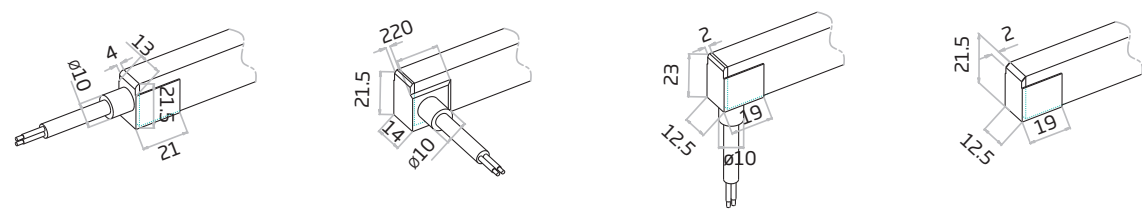

SLN264

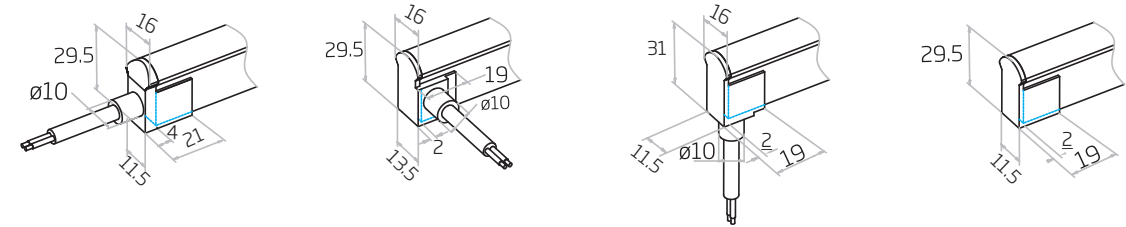


Aluminium :

SLN261




Dimension




Tolerance: ±0.2mm

SLN260 / SLN264

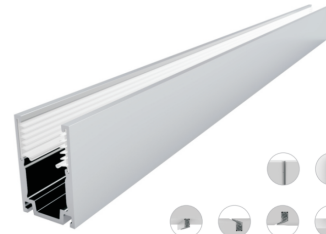

Dimension



Tolerance: ±0.2mm