

LED Spot / Tracklight



TIS TRL102

Application







Track light is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, museums, recreational centers, etc.

Specification

Housing	Die-cast aluminium
Finishing	Powder Coated in white or black
Mounting	1 circuit lighting track (LTS01/LTR01)
Power	23W/30W/35W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	23W:2570/2786/3045 lm 30W:3427/3715/4060 lm 35W:3855/4179/4568 lm
Luminaire Output	23W:2148/2300/2473 lm * 30W:2860/3070/3300 lm * 35W:3160/3390/3645 lm *
Beam Angle	14/24/36/45/60 degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.90
Insulation Class	II
IP Rating	20
Luminaire Lifetime	40,000 hrs.
Equivalent	23W:MH 35W 30W:MH 70W 35W:MH 100W

Ordering Data

Model	Watt
TRL102/WH-23LED	23W
TRL102/WH-30LED	30W
TRL102/WH-35LED	35W

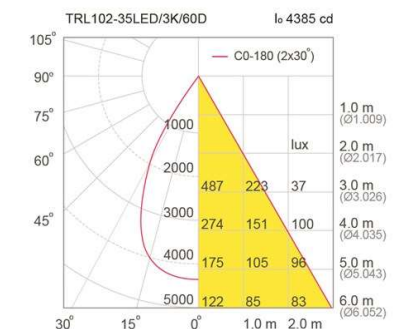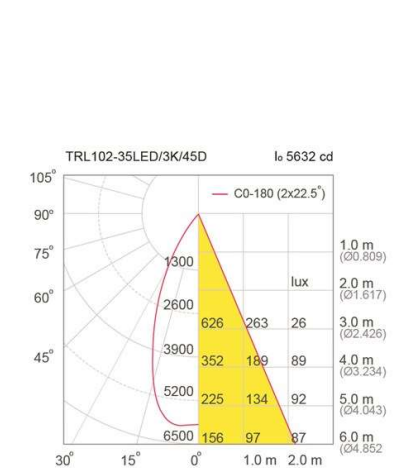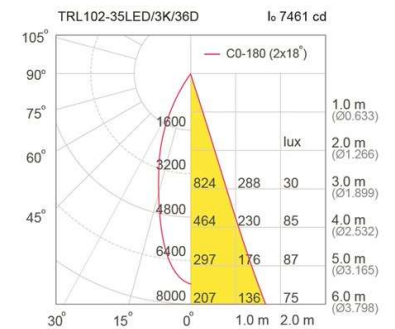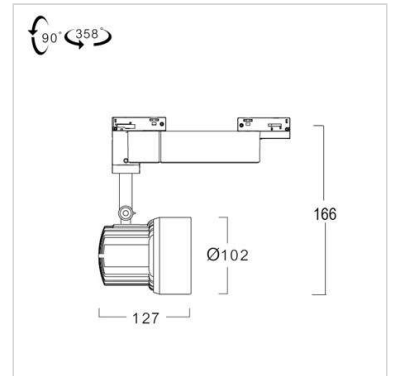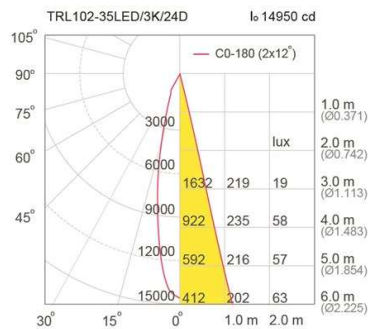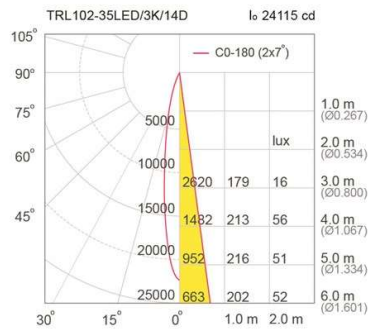

Related Products






TRL102/BK

23W




30W

35W




14D

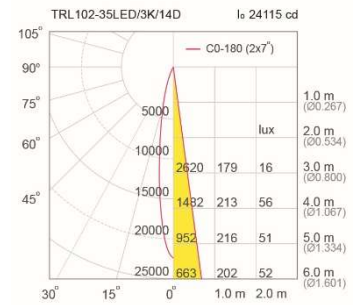




24D

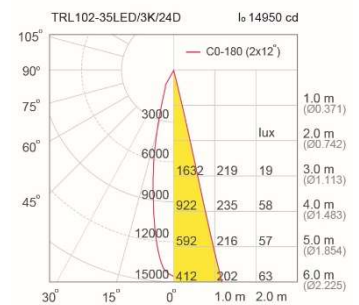

36D

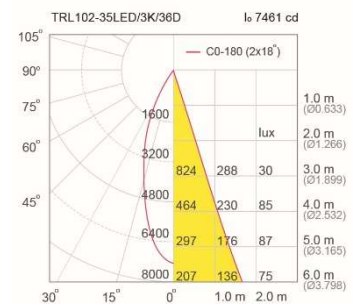

45D

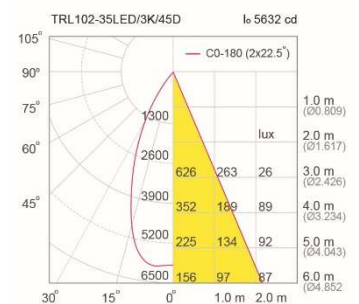

60D

