

LED Spot / Tracklight



TIS TRL1001K

Application

Track light is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, museums, recreational centers, etc.

Specification






Housing	Die-cast aluminium
Finishing	Powder coated in white or black
Mounting	1 circuit lighting track (LTS01/LTR01)
Power	30/35/40W
Light Source	LED-COB
Colour Temperature	3000K/4000K/5000K
CRI	>90/ >90/ >80
LED Output	30W : 3500/3770/4015 lm 35W : 3940/4245/4520 lm 40W : 4665/4995/5270 lm
Luminaire Output	30W : 3096/3343/3560 lm * 35W : 3453/3729/3487 lm * 40W : 3783/4048/4275 lm *
Beam Angle	20/30/50/60 Degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	II
IP Rating	20
Lamp Lifetime	40,000 hrs.
Equivalent	30W : MH 70W 35W : MH 100W 40W : MH 100W

Remarks

* Value at 30 degree

Ordering Data

Model	Watt
TRL1001K/WH-30LED	30W
TRL1001K/WH-35LED	35W
TRL1001K/WH-40LED	40W

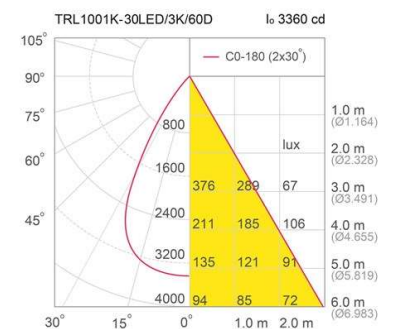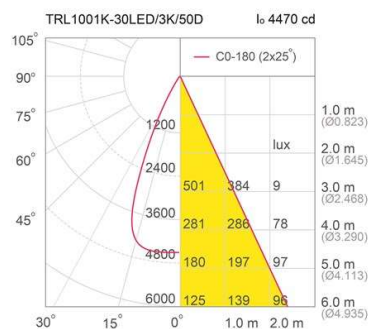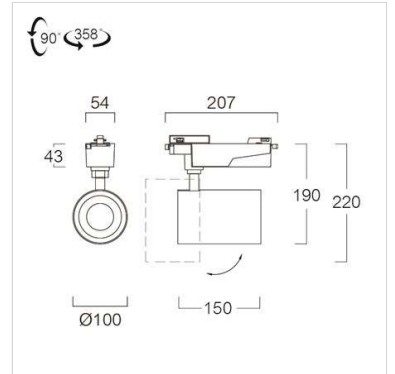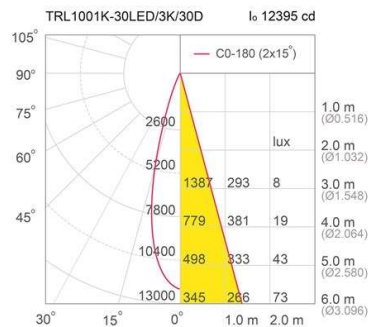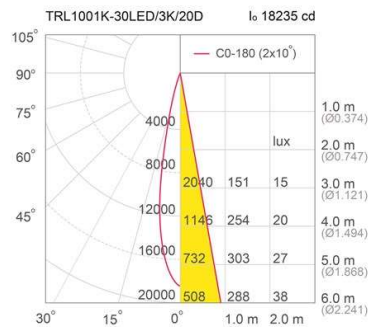

Related Products





TRL1001K/BK



35W

40W



20D



30D



50D



60D

