

LED Spot / Tracklight



TIS TRL110

Application






Track light is designed to use for office buildings, shopping centers, convenience stores, modern trade stores, discount stores, hotels, restaurants, residences, museums, recreational centers, etc.

Specification

Housing	Die-cast and extruded aluminium
Finishing	Powder coated in white or black
Mounting	1 circuit lighting track (LTS01/LTR01)
Power	20/23/30W
Light Source	LED-COB
Colour Temperature	3000/4000/5000K
CRI	>90/ >90/ >80
Lamp Output	20W : 2200/2370/2575 lm 23W : 2635/2845/3090 lm 30W : 3500/3770/4015 lm
Luminaire Output	20W : 1650/1782/1931 lm * 23W : 2398/2590/2806 lm * 30W : 3208/3465/3689 lm *
Beam Angle	15/24/36/50 Degree
Control Gear	Built-in driver
Power Supply	220-240VAC, 50Hz
Power Factor	>0.9
Insulation Class	II
IP Rating	20
LED Lifetime	40,000 hrs.
Equivalent	20W : MH 20W 23W : MH 35W 30W : MH 70W
Remarks	* Value at 24 Degree

Ordering Data

Model	Watt
TRL110/WH-20LED	20W
TRL110/WH-23LED	23W
TRL110/WH-30LED	30W

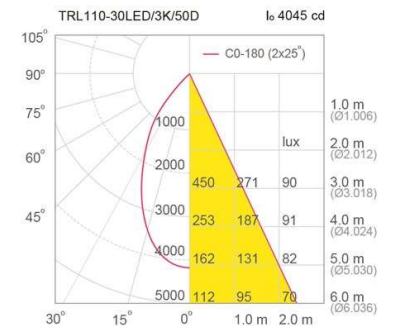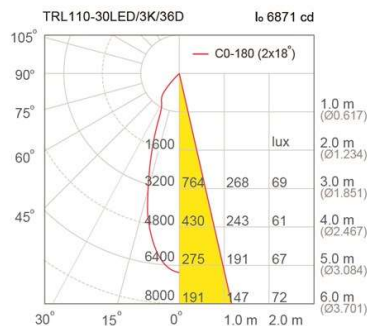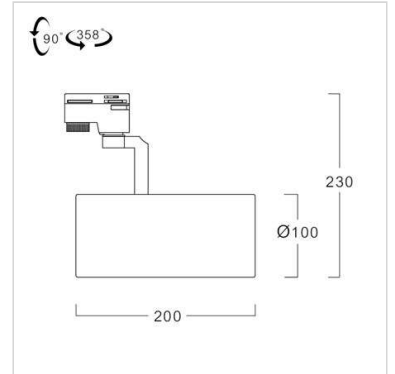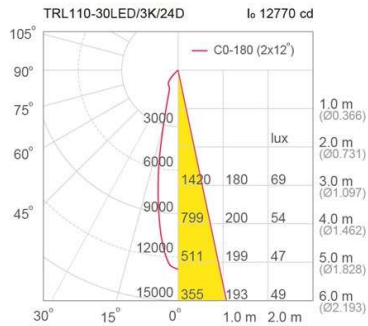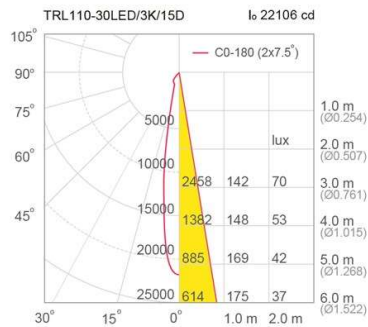

Related Products






20W




23W

30W




15D

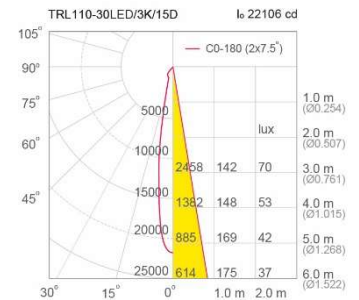

24D

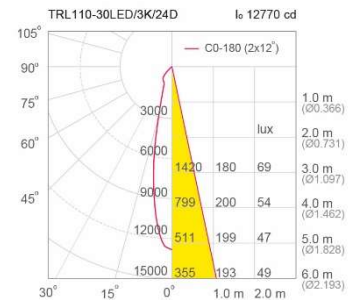

36D

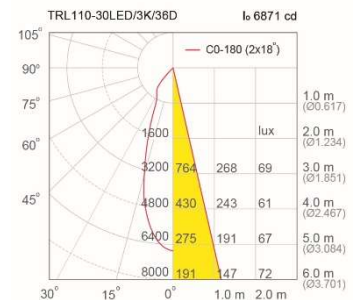

60D

